

UNIVERSIDAD DE CONCEPCIÓN



CENTRO DE INVESTIGACIÓN EN
INGENIERÍA MATEMÁTICA (CI²MA)



Convergence of H(div)-conforming schemes for a new model of
sedimentation in circular clarifiers with a rotating rake

RAIMUND BÜRGER, PAUL E. MÉNDEZ,
RICARDO RUIZ-BAIER

PREPRINT 2019-39

SERIE DE PRE-PUBLICACIONES

Convergence of H(div)-conforming schemes for a new model of sedimentation in circular clarifiers with a rotating rake

Raimund Bürger^a, Paul E. Méndez^a, Ricardo Ruiz-Baier^{b,*}

^aCI²MA and Departamento de Ingeniería Matemática, Universidad de Concepción, Casilla 160-C, Concepción, Chile.

^bMathematical Institute, University of Oxford, A. Wiles Building, Woodstock Road, Oxford OX2 6GG, UK.

Abstract

A macroscopic model is introduced for simulating the sedimentation-consolidation of solid particles in an incompressible fluid under the effect of gravity and in the presence of a slowly rotating arm assisting the removal of sediment on the bottom of clarifier-thickener units. The governing model is an initial-boundary value problem for the Navier-Stokes equations describing the flow of the mixture coupled with a nonlinear parabolic equation describing the volume fraction of solids. The rotating structure is accounted for by suitable drag laws on the momentum balance of the mixture and on the mass balance of the solid phase. An H(div)-conforming method for the coupled problem is proposed, a rigorous proof of convergence is provided, and the validity of the new model and the performance of the scheme are demonstrated numerically by several computational tests.

Keywords: Sedimentation-consolidation, Navier-Stokes equations, Immersed structures, H(div)-conforming schemes, Numerical simulation, Error estimates.

2000 MSC: 65M60, 74F10, 65M12.

1. Introduction

1.1. Scope

We advance a phenomenological model of solid-fluid interaction in a continuously operated clarifier-thickener, which is an equipment widely used in the mining industry, wastewater treatment plants, and other applications. The new approach accounts for the effect of the rotating rake structure, the influence of the settling solid particles, and the three-dimensional incompressible flow of the mixture. A large variety of these devices are used in industry, but most clarifier-thickeners are circular tanks of 1, 50 m to 150 m in diameter equipped with a feed inlet and overflow and discharge outlets for continuous operation. In many devices, a pair of rotating rake arms that move over the gently sloped bottom help to move the concentrated slurry toward the centre of the tank, where it is removed. Clear liquid overflows the top of the tank and is collected through a circumferential launder (see Figure 1.1). Although there are many main types of thickeners or clarifiers such as bridge support, column support, and traction devices, for the purpose of the present modelling framework these are all considered equivalent.

The mathematical modelling and numerical simulation of this kind of processes is challenging due to the intrinsic multiscale and highly nonlinear nature of the sedimentation-consolidation mechanisms,

*Author for correspondence. Email: ruizbaier@maths.ox.ac.uk. Phone: +44 1865 615168.

Email addresses: rburger@ing-mat.udec.cl (Raimund Bürger), pmendez@ci2ma.udec.cl (Paul E. Méndez), ruizbaier@maths.ox.ac.uk (Ricardo Ruiz-Baier)

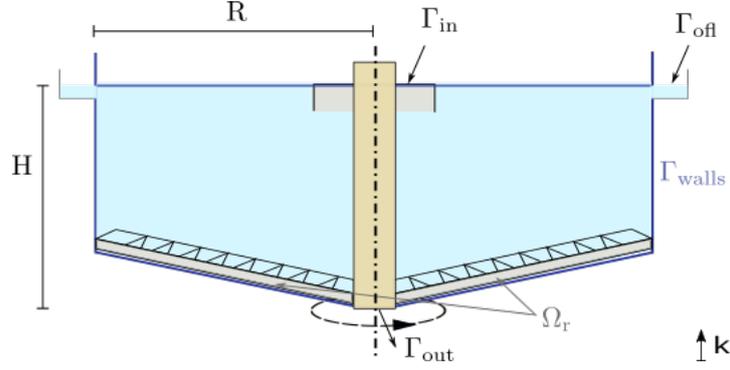


Figure 1.1: Schematic view of the clarifier unit, indicating height H , maximal radius R , and the location of the rotating rake; as well as the separation of the boundary into the walls, the outlet, the feedwell inlet, and the overflow weir.

complicated geometries and boundary conditions, as well as the feedback interaction between the mixture flow and the motion of the rake (the fluid applies a load on the solid structure, implying a deformation, generating stresses, and eventually modifying the flow). For instance, simplified models that would be based on geometrical symmetry are in this case of very restricted applicability, since the settling of the particles occurs in the vertical direction while the rotation of the rake acts in two horizontal directions, and the velocity distribution under typical operating conditions is quite far from unidirectional.

We consider process of sedimentation and transport of a suspension consisting of a phase of finely divided solid particles dispersed in a viscous fluid. This mixture is contained in a clarifier tank with a moving rake. For the sedimentation-consolidation of the suspension we assume that the particles are relatively small with respect to the tank size and possess the same density. It is assumed that the mixture is composed of incompressible solid and liquid phases, that the mixture velocity is relatively small, and that the suspension is already flocculated before the process starts (see [14, 35]). The motion of the mixture is governed by the incompressible Navier-Stokes equations coupled with the transport equation for the solids as follows,

$$\rho_f \left(\frac{\partial \mathbf{u}}{\partial t} + \mathbf{div}(\mathbf{u} \otimes \mathbf{u}) \right) - \mathbf{div}(\nu(c)\varepsilon(\mathbf{u})) + \nabla p = \mathbf{f}_g(c) + \mathbf{f}_r(\mathbf{u}, \mathbf{x}, t), \quad (1.1a)$$

$$\mathbf{div} \mathbf{u} = 0, \quad (1.1b)$$

$$\frac{\partial c}{\partial t} - \mathbf{div}(D(c)\nabla c - c\mathbf{u} - f_{bk}(c)\mathbf{k}) = -g_r(c, \mathbf{x}, t) \quad \text{in } \Omega \times (0, T). \quad (1.1c)$$

Here the sought quantities are the mixture velocity \mathbf{u} , the pressure p and the local solids fraction c as functions of time $t \in [0, T]$ and spatial position $\mathbf{x} \in \Omega \subset \mathbb{R}^3$, where the spatial domain Ω represents the interior of the clarifier-thickener. Moreover, ρ_f is the fluid density, $\varepsilon(\mathbf{u}) = \frac{1}{2}(\nabla \mathbf{u} + \nabla \mathbf{u}^T)$ is the strain rate tensor, and \mathbf{k} is the upwards-pointing unit vector. The material behaviour is described by the concentration-dependent viscosity ν , the Kynch batch flux density function f_{bk} , and the diffusion function D . These three quantities are nonlinear given functions of c that are specified in Section 2.1. The term $\mathbf{f}_g(c)$ represents the body force and is given by $\mathbf{f}_g(c) = \mathbf{g}(\rho_s - \rho_f)c$ as in [16], where $\mathbf{g} = -g\mathbf{k}$ and g is the acceleration of gravity. The terms $\mathbf{f}_r(\mathbf{u}, \mathbf{x}, t)$ and $g_r(c, \mathbf{x}, t)$ describe the action of the rotating rake, and are specified in Section 2.2. The system (1.1) is supplied with initial and boundary conditions that are made precise in Section 2.3.

It is the purpose of this paper to advance a novel discretisation for the resulting initial-boundary value problem that is of second-order in space and time. The discretisation employs divergence-

conforming Brezzi-Douglas-Marini (BDM) elements of order k for the approximation of the velocity, discontinuous elements of order $k - 1$ for the pressure, and continuous Lagrange elements of order k for the volume fraction. We use an interior penalty discontinuous Galerkin technique in order to enforce H^1 -continuity of the velocity (similarly as done in [13]); and employ the second-order backward differentiation formula (BDF2) for the discretisation in time. Our analysis includes the stability of solutions of the associated Galerkin scheme and the derivation of optimal error estimates in time and space for problems with small and sufficiently smooth solutions. These properties constitute a proof of convergence of the fully discrete scheme as the meshwidth and the time step tend to zero. The novelty of the treatment consists in the inclusion of terms that account for the influence of the rake motion on the momentum balance and the removal of solids. We also adapt techniques of the immerse boundary finite element method (see e.g. [6]) for the analysis and numerical approximation of those terms.

1.2. Related work

Early models for the clarifying process with and without swirl effects are reviewed in [37], where mainly axisymmetric configurations were employed. More recently, a fairly complete model can be found in [16], where the authors couple the momentum equations for fluid flow with a transport equation for solids. The realisable $k - \epsilon$ model, in conjunction with scalable wall functions, is used to model turbulence. The removal of sludge from the clarifier floor by means of a spinning rake is modelled through a rotating sink term added to the right-hand side of the transport equation. References that are related to the rake mechanism in applications of mineral processing include [15, 23, 24, 25, 31, 34, 36, 38]; see Section 5 for further discussion.

Here we also include appropriate drag terms, much as in [39], that account for the indirect effects of the rake on the flow patterns. This consists basically in penalising the moving structure and computing (or as we do here, simply imposing) its velocity and its reconfiguration in an adequate manner. Volume penalisation techniques can be frequently found in the relevant literature. See for instance [28], where the authors propose high-order methods for the modelling of solid obstacles as porous structures whose permeability tends to zero and the flow is regarded in a unified domain, and the momentum on the obstacle is simply obtained from integration of the penalised velocity over the obstacle domain. Other modelling and numerical approaches one could use to incorporate the interaction between the rake and the flow include immerse boundary and fictitious domain finite elements [7], level set methods and their variants [18, 32], other unfitted finite element schemes [5]; or formulations based on remodelling, such as the arbitrary Lagrangian-Eulerian (ALE) setting [40].

1.3. Outline of the paper

We have organised the contents of this paper in the following manner. Section 2 describes the general governing equations, the constitutive relations, and the interaction terms. It also specifies the boundary and initial conditions, and it outlines the weak formulation of the problem for a fixed time. In Section 3 we introduce the Galerkin discretisation and define the fully discrete method, briefly addressing stability and convergence properties. Section 4 is devoted to the computational results, including parameter calibration, accuracy verification, as well as the simulation of clarifier performance under different operation scenarios. We close the paper with some remarks and discussions given in Section 5.

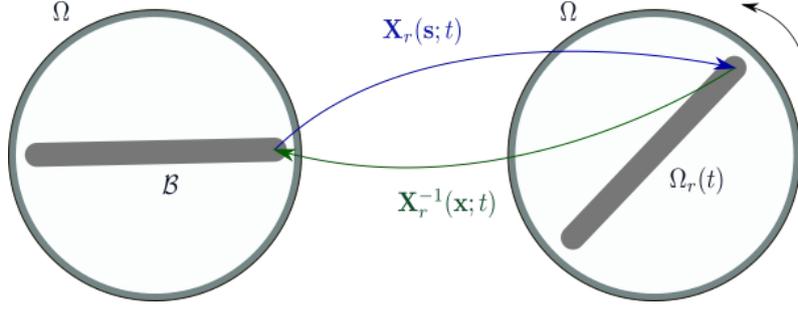


Figure 2.1: Schematic representation of the mapping X_r from the rake reference domain \mathcal{B} to the moving domain $\Omega_r(t)$ in a longitudinal section of the clarifier unit.

2. Preliminaries

2.1. Constitutive functions

The viscosity ν is supposed to be given by the following nonlinear function of c :

$$\nu(c) = \nu_0 + \nu_0(1 - c/c_{\max})^b, \quad (2.2)$$

where ν_0 is the viscosity of the pure fluid, $b > 0$ is a parameter, and c_{\max} is a (nominal) maximum solids volume fraction. We do not consider here the high-order terms that account for microstructural arrangement of the granular material as e.g. in [35].

Moreover, the one-dimensional Kynch batch flux density function describing hindered settling [30], f_{bk} ; and the sediment compressibility, $D(c)$; are non linear functions of the concentration c , which can be taken as follows [12]:

$$D(c) = D_0 + \frac{f_{\text{bk}}(c)\sigma'_e(c)}{(\rho_s - \rho_f)gc}, \quad f_{\text{bk}}(c) = u_\infty \left[c \left(1 - \frac{c}{c_{\max}} \right)^{\eta_F} \right], \quad (2.3)$$

where u_∞ is the Stokes velocity, η_F a material-dependent exponent, $D_0 > 0$ is the constant of hydrodynamic self-diffusion, ρ_s and ρ_f are the solid and fluid mass densities, respectively, and $\sigma_e(c)$ is the so-called effective solid stress function, which characterises sediment compressibility in the case of flocculated particles. The function σ_e is assumed to satisfy $\sigma'_e(c) = d\sigma_e(c)/dc \geq 0$ for all c , which ensures that $D(c) \geq D_0 > 0$.

2.2. Rotating rake

To include the rotating rake into the computational model, we follow Das et al. [16] using a simplified approach that only takes into account the area of influence of the rake, and characterises the details of its geometry through parameters. The rake area of influence (hereinafter we will refer to it only as rake) $\Omega_r(t)$ can be represented as the image of a mapping $X_r(\cdot; t)$ from a reference domain $\mathcal{B} \subset \mathbb{R}^d$ (see figure 2.1). We denote by s the coordinates in \mathcal{B} , then $X_r(s; t)$ represents the position of a point in the current domain $\Omega_r(t)$. That is, $x \in \Omega_r(t)$ if and only if there exists $s \in \mathcal{B}$ such that $x = X_r(s; t)$. For simplicity we will consider a constant angular velocity ω for the rake, then the rake velocity $u_r(s)$, depends only on the distance to the rake centre. Further, we suppose f_r depends on the difference between the fluid velocity and the rake velocity u_r ; and g_r depends on the difference between the concentration in front of the rake and a concentration after removal c_r , which is linked to the rake geometry. To express

$\mathbf{f}_r(\mathbf{u}, \mathbf{x}, t)$ in compact form, it is useful to define the function $\zeta : \mathbb{R} \rightarrow \mathbb{R}$ given by $\zeta(x) = x^2 \operatorname{sgn} x = x|x|$. Then we define

$$\mathbf{f}_r(\mathbf{u}, \mathbf{x}, t) := \begin{cases} \beta \rho_r \zeta((\mathbf{u}_r(\mathbf{X}_r^{-1}(\mathbf{x}; t)) - \mathbf{u}(\mathbf{x}, t)) \cdot \mathbf{n}_r) \mathbf{n}_r & \text{if } \mathbf{x} \in \Omega_r(t), \\ \mathbf{0} & \text{otherwise,} \end{cases}$$

$$g_r(c, \mathbf{x}, t) := \begin{cases} \alpha (c(\mathbf{x}, t) - c_r) & \text{if } \mathbf{x} \in \Omega_r(t), \\ 0 & \text{otherwise,} \end{cases}$$

where α is a removal coefficient, β is the drag coefficient that includes the contact surface to volume ratio, ρ_r the rake density and \mathbf{n}_r the vector pointing towards the tangential direction with respect to the circular motion of the rake in the (x_1, x_2) -plane. Following the approach of the immersed boundary method [6, 7] as well as a recently proposed model arising in the context of flow-canopy interaction [39], we rewrite these expressions as

$$\mathbf{f}_r(\mathbf{u}, \mathbf{x}, t) = \beta \rho_r \int_{\mathcal{B}} \zeta(\mathbf{u}_r(\mathbf{s}) - \mathbf{u}(\mathbf{X}_r(\mathbf{s}, t); t)) \cdot \mathbf{n}_r \delta(\mathbf{x} - \mathbf{X}_r(\mathbf{s}, t)) \, ds, \quad (2.4)$$

$$g_r(c, \mathbf{x}, t) = \alpha \int_{\mathcal{B}} (c(\mathbf{X}_r(\mathbf{s}, t); t) - c_r) \delta(\mathbf{x} - \mathbf{X}_r(\mathbf{s}, t)) \, ds \quad \text{for all } \mathbf{x} \in \Omega \text{ and } t \in (0, T).$$

Here, δ is the Dirac delta function. Even if the presence of the rotating arm through (2.4) does not resolve stress localisation on the structure, it already represents an extension over the model in [16].

2.3. Initial and boundary conditions

The set of governing equations is furnished with the following initial and boundary conditions:

$$\mathbf{u}(0) = \mathbf{0}, \quad c(0) = c_0 \quad \text{in } \Omega, \quad (2.5a)$$

$$\mathbf{u}(\mathbf{x}, t) = \mathbf{u}_{\text{in}} \quad \text{on } \Gamma_{\text{in}}, t \in [0, T], \quad (2.5b)$$

$$c(\mathbf{x}, t) = c_{\text{in}} \quad \text{on } \Gamma_{\text{in}}, t \in [0, T], \quad (2.5c)$$

$$\mathbf{u}(\mathbf{x}, t) = \mathbf{0} \quad \text{on } \Gamma_{\text{wall}}, t \in [0, T], \quad (2.5d)$$

$$[\nu(c)\varepsilon(\mathbf{u}) - p\mathbf{I}]\mathbf{n} = \mathbf{0} \quad \text{on } \Gamma_{\text{out}} \cup \Gamma_{\text{off}}, t \in [0, T], \quad (2.5e)$$

$$(D(c)\nabla c - f_{\text{bk}}(c)\mathbf{k}) \cdot \mathbf{n} = 0 \quad \text{on } \Gamma_{\text{wall}} \cup \Gamma_{\text{in}}, t \in [0, T], \quad (2.5f)$$

$$D(c)\nabla c \cdot \mathbf{n} = 0 \quad \text{on } \Gamma_{\text{out}} \cup \Gamma_{\text{off}}, t \in [0, T], \quad (2.5g)$$

which represent that at the inlet we impose velocity and volume fraction of solids, on the walls we set no-slip velocity and zero-flux for c , and on the outlet and effluent overflow regions we set zero normal total stress, and zero total flux. The disposition of domain boundaries is exemplified in Figure 1.1.

2.4. Weak formulation

We shall use standard notation for function spaces. So, for instance, $L^p(\Omega)$, $W^{m,p}(\Omega)$, will denote the usual Lebesgue and Sobolev spaces on the domain Ω , with norms $\|\cdot\|_{p,\Omega}$ and $\|\cdot\|_{m,p,\Omega}$, respectively. We denote by $L^s(0, T; W^{m,p}(\Omega))$ the Banach space of all L^s -integrable functions from $[0, T]$ into $W^{m,p}(\Omega)$, with norm

$$\|v\|_{L^s(0,T;W^{m,p}(\Omega))} = \left(\int_0^T \|v\|_{W^{m,p}(\Omega)}^s \, dt \right)^{1/s}.$$

By \mathbf{L} and \mathbb{L} we denote the corresponding vectorial and tensorial counterparts of the scalar functional space L .

The weak formulation of problem (1.1) is obtained by testing against suitable functions and integrating by parts, and can be stated as follows:

Find $(\mathbf{u}(t), p(t), c(t)) \in \mathbf{H}^1(\Omega) \times L^2(\Omega) \times H^1(\Omega)$ satisfying
the boundary conditions (2.5b) and (2.5c) and for all $\mathbf{v} \in \mathbf{H}_0^1(\Omega)$, $q \in L^2(\Omega)$ and $l \in H^1(\Omega)$:

$$\begin{aligned} (\partial_t \mathbf{u}(t), \mathbf{v})_\Omega + a_1(c(t); \mathbf{u}(t), \mathbf{v}) + c_1(\mathbf{u}(t); \mathbf{u}(t), \mathbf{v}) - b(\mathbf{v}, p(t)) &= \mathbf{F}_g(c(t), \mathbf{v}) + \mathbf{F}_r(\mathbf{u}(t), \mathbf{v}), \\ b(\mathbf{u}(t), q) &= 0, \\ (\partial_t c(t), l)_\Omega + a_2(c(t); c(t), l) + c_2(\mathbf{u}(t); c(t), l) - d_2(c(t), l) &= -G_r(c(t), l). \end{aligned} \quad (2.6)$$

Using [6, Lemma 1], we can consider $\mathbf{F}_r \in \mathbf{H}^{-1}(\Omega)$, $G_r \in H^{-1}(\Omega)$, and the variational forms that are defined as follows for all $\mathbf{u}, \mathbf{v}, \mathbf{w} \in \mathbf{H}^1(\Omega)$, $q \in L^2(\Omega)$, and $c, l \in H^1(\Omega)$:

$$\begin{aligned} a_1(c; \mathbf{u}, \mathbf{v}) &:= (\nu(c) \boldsymbol{\varepsilon}(\mathbf{u}), \boldsymbol{\varepsilon}(\mathbf{v}))_\Omega, \quad b(\mathbf{v}, q) := (q, \operatorname{div} \mathbf{v})_\Omega, \quad c_1(\mathbf{w}; \mathbf{u}, \mathbf{v}) := ((\mathbf{w} \cdot \nabla) \mathbf{u}, \mathbf{v})_\Omega, \\ \mathbf{F}_g(c, \mathbf{v}) &= (\mathbf{g}(\rho_f - \rho_s) c, \mathbf{v})_\Omega, \\ \mathbf{F}_r(\mathbf{u}, \mathbf{v}) &= \beta \rho_r \int_B \zeta((\mathbf{u}_r(\mathbf{s}) - \mathbf{u}(\mathbf{X}_r(\mathbf{s}; t)), t) \cdot \mathbf{n}_r) \mathbf{n}_r \mathbf{v}(\mathbf{X}_r(\mathbf{s}; t)) \, ds, \\ a_2(c; c, l) &:= (D(c) \nabla c, \nabla l)_\Omega, \quad c_2(\mathbf{v}; c, l) := (\mathbf{v} \cdot \nabla c, l)_\Omega, \\ d_2(c, l) &= (f_{\text{bk}}(c) \mathbf{k}, \nabla l)_\Omega - \langle f_{\text{bk}}(c) \mathbf{k} \cdot \mathbf{n}, l \rangle_{\Gamma_{\text{out}} \cup \Gamma_{\text{off}}}, \quad G_r(c, l) := \alpha \int_B (c(\mathbf{X}_r(\mathbf{s}; t), t) - c_r) l(\mathbf{X}_r(\mathbf{s}; t)) \, ds. \end{aligned}$$

Although some related results are available from the literature, for instance the existence of strong and weak solutions for the periodic motion of a rigid body in an incompressible fluid [20], the solvability analysis of (2.6) is still an open problem. We will proceed to the semidiscrete analysis under the assumption that the continuous problem is well-posed and that the weak solutions are regular enough.

3. Numerical method

3.1. Definition of the discrete problem

For the space discretisation, we will consider a family of regular partitions, denoted \mathcal{T}_h , of $\Omega \subset \mathbb{R}^d$ into simplices K (triangles in 2D or tetrahedra in 3D) of diameter h_K . The mesh size (the maximum of these diameters) will be denoted by h , and for any interior facet e in \mathcal{E}_h (the set of faces in \mathcal{T}_h), we will label K^- and K^+ the elements adjacent to it, while h_e will stand for the length of edge in 2D (or maximum diameter of the facet in 3D). Supposing that \mathbf{v}, w are, respectively, smooth vector and scalar fields defined over \mathcal{T}_h . Then, by (\mathbf{v}^\pm, w^\pm) we will denote the traces of (\mathbf{v}, w) on e being the extensions from the interiors of the elements K^+ and K^- , respectively. Let \mathbf{n}_e^\pm denote the outward unit normal vector to e on K^\pm (hence, $\mathbf{n}^+ = -\mathbf{n}^-$). We define the average $\{\{\cdot\}\}$ and jump $[\![\cdot]\!]$ operators as $\{\{\mathbf{v}\}\} := (\mathbf{v}^- + \mathbf{v}^+)/2$, $\{\{w\}\} := (w^- + w^+)/2$, $[\![\mathbf{v}]\!] := (\mathbf{v}^- - \mathbf{v}^+)$ and $[\![w]\!] := (w^- - w^+)$, whereas for boundary jumps and averages we adopt the convention that $\{\{\mathbf{v}\}\} = [\![\mathbf{v}]\!] = \mathbf{v}$ and $\{\{w\}\} = [\![w]\!] = w$. In addition, we denote by ∇_h the broken gradient operator.

For $k \geq 1$ and a mesh \mathcal{T}_h on Ω , let us consider the discrete spaces (see e.g. [8, 13])

$$\begin{aligned} \mathbf{V}_h &:= \{ \mathbf{v}_h \in \mathbf{H}(\operatorname{div}; \Omega) : \mathbf{v}_h|_K \in [\mathbb{P}_k(K)]^d \quad \forall K \in \mathcal{T}_h \}, \\ \mathcal{Q}_h &:= \{ q_h \in L^2(\Omega) : q_h|_K \in \mathbb{P}_{k-1}(K) \quad \forall K \in \mathcal{T}_h \}, \\ \mathcal{M}_h &:= \{ s_h \in C(\bar{\Omega}) : s_h|_K \in \mathbb{P}_k(K) \quad \forall K \in \mathcal{T}_h \}, \end{aligned}$$

which in particular satisfy $\operatorname{div} \mathbf{V}_h \subset \mathcal{Q}_h$ (cf. [29]). Here $\mathbb{P}_k(K)$ denotes the local space spanned by polynomials of degree up to k and \mathbf{V}_h is the space of divergence-conforming BDM elements. Associated

with these finite-dimensional spaces, we state the following semi-discrete Galerkin formulation for problem (1.1):

$$\begin{aligned} & \text{Find } (\mathbf{u}_h, p_h, c_h) \in \mathbf{V}_h \times \mathcal{Q}_h \times \mathcal{M}_h \text{ such that for all } (\mathbf{v}_h, q_h, l_h) \in \mathbf{V}_h \times \mathcal{Q}_h \times \mathcal{M}_h: \\ & (\partial_t \mathbf{u}_h, \mathbf{v}_h)_\Omega + a_1^h(c_h; \mathbf{u}_h, \mathbf{v}_h) + c_1^h(\mathbf{u}_h; \mathbf{u}_h, \mathbf{v}_h) - b(\mathbf{v}_h, p_h) = \mathbf{F}_g(c_h, v_h) + \mathbf{F}_r(\mathbf{u}_h, \mathbf{v}_h), \\ & b(\mathbf{u}_h, q_h) = 0, \\ & (\partial_t c_h, l_h)_\Omega + a_2(c_h; c_h, l_h) + c_2(\mathbf{u}_h; c_h, l_h) - d_2(c_h, l_h) = -G_r(c_h, l_h). \end{aligned} \quad (3.7)$$

Here the discrete versions of the trilinear forms $a_1^h(\cdot; \cdot, \cdot)$ and $c_1^h(\cdot; \cdot, \cdot)$ are defined using a symmetric interior penalty and an upwind approach, respectively (see e.g. [4, 29]):

$$\begin{aligned} a_1^h(c_h; \mathbf{u}_h, \mathbf{v}_h) &:= \int_\Omega (\nu(c_h) \boldsymbol{\varepsilon}_h(\mathbf{u}_h) : \boldsymbol{\varepsilon}_h(\mathbf{v}_h)) \\ &+ \sum_{e \in \mathcal{E}_h} \int_e \left(-\{\{\nu(c_h) \boldsymbol{\varepsilon}_h(\mathbf{u}_h)\}\} : \llbracket \mathbf{v}_h \rrbracket - \{\{\nu(c_h) \boldsymbol{\varepsilon}_h(\mathbf{v}_h)\}\} : \llbracket \mathbf{u}_h \rrbracket + \frac{a_0}{h_e} \nu(c_h) \llbracket \mathbf{u}_h \rrbracket : \llbracket \mathbf{v}_h \rrbracket \right), \\ c_1^h(\mathbf{w}_h; \mathbf{u}_h, \mathbf{v}_h) &:= \int_\Omega (\mathbf{w}_h \cdot \nabla) \mathbf{u}_h \cdot \mathbf{v}_h + \sum_{K \in \mathcal{T}_h} \int_{\partial K \setminus \Gamma} \hat{\mathbf{w}}_h^{\text{up}}(\mathbf{u}_h) \cdot \mathbf{v}_h, \end{aligned}$$

where the upwind flux is defined as $\hat{\mathbf{w}}_h^{\text{up}}(\mathbf{u}_h) := \frac{1}{2}(\mathbf{w}_h \cdot \mathbf{n}_k - |\mathbf{w}_h \cdot \mathbf{n}_k|)(\mathbf{u}_h^e - \mathbf{u}_h)$, and \mathbf{u}_h^e is the trace of \mathbf{u}_h taken from within the exterior of K .

Let us introduce a partition of the interval $[0, T]$ into N subintervals $[t_{n-1}, t_n]$ of length τ . We will use an implicit, second-order backward differentiation formula (BDF2). That is, all first-order time derivatives are approximated using the centred operator

$$\partial_t \mathbf{u}_h(t^{n+1}) \approx \frac{1}{\tau} \left(\frac{3}{2} \mathbf{u}_h^{n+1} - 2 \mathbf{u}_h^n + \frac{1}{2} \mathbf{u}_h^{n-1} \right),$$

(similarly for $\partial_t c$) whereas for the first time step a first-order backward Euler method is used from t^0 to t^1 , starting from the interpolates \mathbf{u}_h^0, c_h^0 of the initial data. The resulting set of nonlinear equations is solved with an iterative Newton-Raphson method with exact Jacobian.

3.2. Spatio-temporal accuracy of the discretisation

For sake of the subsequent analysis, we assume Lipschitz continuity of the concentration-dependent viscosity

$$\nu \in \text{Lip}(\mathbb{R}_+); \quad \exists \nu_{\min}, \nu_{\max} : \forall c \in \mathbb{R}_+ : \nu_{\min} \leq \nu(c) \leq \nu_{\max}.$$

Moreover, the flux $f_{\text{bk}}(c)$ is assumed to be Lipschitz continuous, and the diffusion coefficient $D = D(c)$ is supposed to be a nonlinear function satisfying

$$D \in \text{Lip}(\mathbb{R}_+); \quad \exists D_1, D_2 > 0 : \forall c \in \mathbb{R}_+ : D_1 \leq D(c) \leq D_2. \quad (3.8)$$

For simplicity, we impose the following modified boundary conditions:

$$\mathbf{u}(\mathbf{x}, t) = \mathbf{0}, \quad c(\mathbf{x}, t) = 0, \quad (D(c) \nabla c - f_{\text{bk}}(c) \mathbf{k}) \cdot \mathbf{n} = 0 \quad \text{on } \Gamma, t \in [0, T],$$

and we emphasise that the analysis can be extended to the non-homogeneous case following, for instance, lifting arguments.

We utilise the following mesh dependent broken norms

$$\begin{aligned} \|\mathbf{v}\|_{*,\mathcal{T}_h}^2 &:= \sum_{K \in \mathcal{T}_h} \|\nabla \mathbf{v}\|_{0,K}^2 + \sum_{e \in \mathcal{E}_h} \frac{1}{h_e} \|[[\mathbf{v}]]\|_{0,e}^2, & \|\mathbf{v}\|_{1,\mathcal{T}_h}^2 &:= \|\mathbf{v}\|_{0,\Omega}^2 + \|\mathbf{v}\|_{*,\mathcal{T}_h}^2 \quad \text{for all } \mathbf{v} \in \mathbf{H}^1(\mathcal{T}_h), \\ \|\mathbf{v}\|_{2,\mathcal{T}_h}^2 &:= \|\mathbf{v}\|_{1,\mathcal{T}_h}^2 + \sum_{K \in \mathcal{T}_h} h_K^2 |\mathbf{v}|_{2,K}^2 \quad \text{for all } \mathbf{v} \in \mathbf{H}^2(\mathcal{T}_h). \end{aligned}$$

We also recall the broken version of the well-known Sobolev embedding result (see e.g. [22, Lemma 6.2], [26, Prop. 4.5] or [19, Th. 5.3]): for any $r > 1$ if $d = 2$ or $1 \leq r \leq 6$, if $d = 3$ there exists a constant $C_{\text{emb}} > 0$ such that

$$\|\mathbf{v}\|_{L^r(\Omega)} \leq C_{\text{emb}} \|\mathbf{v}\|_{1,\mathcal{T}_h} \quad \text{for all } \mathbf{v} \in \mathbf{H}^1(\mathcal{T}_h). \quad (3.9)$$

Furthermore, we will use the broken space

$$\mathbf{C}^1(\mathcal{T}_h) := \{\mathbf{u} \in \mathbf{H}^1(\mathcal{T}_h) : \mathbf{u}|_K \in \mathbf{C}^1(\bar{K}), K \in \mathcal{T}_h\},$$

equipped with an appropriate norm $\|\mathbf{u}\|_{\mathbf{W}^{1,\infty}(\mathcal{T}_h)} := \max_{K \in \mathcal{T}_h} \|\mathbf{u}\|_{\mathbf{W}^{1,\infty}(K)}$. Using the discrete norms, embedding (3.9) and local trace inequalities, we can establish continuity of the trilinear and bilinear forms involved, stated in the following lemma that can be proved following [4, Section 4]:

Lemma 3.1. *The following properties hold:*

$$|a_1^h(\cdot, \mathbf{u}, \mathbf{v})| \leq \tilde{C}_a \|\mathbf{u}\|_{1,\mathcal{T}_h} \|\mathbf{v}\|_{1,\mathcal{T}_h} \quad \text{for all } \mathbf{u}, \mathbf{v} \in \mathbf{V}_h, \quad (3.10a)$$

$$|b(\mathbf{v}, q)| \leq \|\mathbf{v}\|_{1,\mathcal{T}_h} \|q\|_{0,\Omega} \quad \text{for all } \mathbf{v} \in \mathbf{H}^1(\mathcal{T}_h), q \in L_0^2(\Omega), \quad (3.10b)$$

$$|c_2(\mathbf{w}; c, l)| \leq \tilde{C}_1 \|\mathbf{w}\|_{1,\mathcal{T}_h} \|l\|_{1,\Omega} \|c\|_{1,\Omega} \quad \text{for all } \mathbf{w} \in \mathbf{H}^1(\mathcal{T}_h) \text{ and } l, c \in H^1(\Omega). \quad (3.10c)$$

Moreover, for $c_1, c_2 \in H^1(\Omega)$, $c \in W^{1,\infty}(\Omega)$, $\mathbf{u} \in \mathbf{C}^1(\mathcal{T}_h) \cap \mathbf{H}_0^1(\Omega)$ and $\mathbf{v} \in \mathbf{V}_h$, there holds

$$\begin{aligned} |a_1^h(c_1; \mathbf{u}, \mathbf{v}) - a_1^h(c_2; \mathbf{u}, \mathbf{v})| &\leq \tilde{C}_{\text{Lip}} \|c_1 - c_2\|_{1,\Omega} \|\mathbf{u}\|_{\mathbf{W}^{1,\infty}(\mathcal{T}_h)} \|\mathbf{v}\|_{1,\mathcal{T}_h}, \\ |a_2(c_1, c, l) - a_2(c_2, c, l)| &\leq \hat{C}_{\text{Lip}} \|c_1 - c_2\|_{1,\Omega} \|c\|_{W^{1,\infty}(\Omega)} \|l\|_{1,\Omega}, \end{aligned} \quad (3.11)$$

where the constant $\tilde{C}_{\text{Lip}} > 0$ is independent of h (cf. [13]). A related result follows for $c_1^h(\cdot; \cdot, \cdot)$ as in [33, Lemma 3.4]. On the other hand, let $\mathbf{w}_1, \mathbf{w}_2, \mathbf{u} \in \mathbf{H}^2(\mathcal{T}_h)$ and $\mathbf{v} \in \mathbf{V}_h$. Then there exists $\tilde{C}_u > 0$ independently of h such that

$$|c_1^h(\mathbf{w}_1; \mathbf{u}, \mathbf{v}) - c_1^h(\mathbf{w}_2; \mathbf{u}, \mathbf{v})| \leq \tilde{C}_u \|\mathbf{w}_1 - \mathbf{w}_2\|_{1,\mathcal{T}_h} \|\mathbf{u}\|_{1,\mathcal{T}_h} \|\mathbf{v}\|_{1,\mathcal{T}_h}. \quad (3.12)$$

Moreover, while the coercivity of the form $a_2(\cdot, \cdot, \cdot)$ is readily implied by (3.8),

$$a_2(\cdot, c, c) \geq \hat{\alpha}_a \|c\|_{1,\Omega}^2 \quad \text{for all } c \in H^1(\Omega), \quad (3.13)$$

there also holds (cf. [29, Lemma 3.2])

$$a_1^h(\cdot, \mathbf{v}, \mathbf{v}) \geq \tilde{\alpha}_a \|\mathbf{v}\|_{1,\mathcal{T}_h}^2 \quad \text{for all } \mathbf{v} \in \mathbf{V}_h, \quad (3.14)$$

provided that $a_0 > 0$ is sufficiently large and independent of the meshsize.

Furthermore, based on the assumptions on D , we have

$$|a_2(\cdot; c, l)| \leq \hat{C}_a \|c\|_{1,\Omega} \|l\|_{1,\Omega} \quad \text{for all } c, l \in H^1(\Omega). \quad (3.15)$$

In addition, if we let $\mathbf{w} \in \mathbf{H}_0(\operatorname{div}^0; \Omega) := \{\mathbf{w} \in \mathbf{H}(\operatorname{div}, \Omega) : \mathbf{w} \cdot \mathbf{n} = 0 \text{ on } \partial\Omega, \operatorname{div} \mathbf{w} = \mathbf{0} \text{ in } \Omega\}$, then according to [33] we can write

$$c_1^h(\mathbf{w}; \mathbf{u}, \mathbf{u}) = \frac{1}{2} \sum_{e \in \mathcal{E}_h^i} \int_e |\mathbf{w} \cdot \mathbf{n}_e| \|\mathbf{u}\|^2 \geq 0 \quad \text{for all } \mathbf{u} \in \mathbf{V}_h, \quad (3.16)$$

as well as the relation

$$c_2(\mathbf{w}; l_h, l_h) = 0 \quad \text{for all } l_h \in \mathcal{M}_h, \quad (3.17)$$

which arises from integration by parts and holds at the discrete level since the produced discrete velocities are exactly divergence free. Based on the assumptions on f_{bk} , it is also clear that

$$|d_2(c_1, l) - d_2(c_2, l)| \leq C_d \|c_1 - c_2\|_{0,\Omega} \|l\|_{1,\Omega}. \quad (3.18)$$

Finally, we recall from [29] the following discrete inf-sup condition for $b(\cdot, \cdot)$, where $\tilde{\beta}$ is independent of h :

$$\sup_{\mathbf{v}_h \in \mathbf{V}_h \setminus \{\mathbf{0}\}} \frac{b(\mathbf{v}_h, q_h)}{\|\mathbf{v}_h\|_{1,\mathcal{T}_h}} \geq \tilde{\beta} \|q_h\|_{0,\Omega} \quad \text{for all } q_h \in \mathcal{Q}_h. \quad (3.19)$$

Remark 3.1. Using the definition and characterisation of the kernel \mathbf{Z} of $b(\cdot, \cdot)$, namely

$$\mathbf{Z} := \{\mathbf{v} \in \mathbf{H}_0^1(\Omega) : b(\mathbf{v}, q) = 0 \ \forall q \in L_0^2(\Omega)\} = \{\mathbf{v} \in \mathbf{H}_0^1(\Omega) : \operatorname{div} \mathbf{v} = 0 \text{ in } \Omega\},$$

and using integration by parts, we can readily observe that

$$c_1(\mathbf{w}; \mathbf{v}, \mathbf{v}) = 0 \quad \text{and} \quad c_2(\mathbf{w}; s, s) = 0 \quad \text{for all } \mathbf{w} \in \mathbf{X}, \mathbf{v} \in \mathbf{H}^1(\Omega), \text{ and } s \in H^1(\Omega).$$

It is also well known (see for instance [9]) that if $(\mathbf{u}, p, c) \in \mathbf{H}_0^1(\Omega) \times L_0^2 \times H^1$ solves (2.6), then $\mathbf{u} \in \mathbf{Z}$ is a solution of the following reduced problem:

For all $t \in (0, T]$, find $(\mathbf{u}, c) \in \mathbf{Z} \times H^1$ such that

$$(\partial_t \mathbf{u}(t), \mathbf{v})_\Omega + a_1(c(t); \mathbf{u}(t), \mathbf{v}) + c_1(\mathbf{u}(t); \mathbf{u}(t), \mathbf{v}) = \mathbf{F}_g(c, \mathbf{v}) + \mathbf{F}_r(\mathbf{u}, \mathbf{v}) \quad \text{for all } \mathbf{v} \in \mathbf{H}_0^1(\Omega), \quad (3.20)$$

$$(\partial_t c(t), l)_\Omega + a_2(c(t); c(t), l) + c_2(\mathbf{u}(t); c(t), l) - d_2(c(t), l) = -G_r(c(t), l) \quad \text{for all } l \in H^1(\Omega).$$

Conversely, if $(\mathbf{u}, c) \in \mathbf{Z} \times H^1$ is a solution of (3.20), then there exists a pressure $p \in L_0^2$ such that (\mathbf{u}, p, c) is a solution of (2.6). As in the continuous case, we define the discrete kernel of the bilinear form $b(\cdot, \cdot)$ as

$$\mathbf{Z}_h := \{\mathbf{v}_h \in \mathbf{V}_h : b(\mathbf{v}_h, q_h) = 0 \ \forall q_h \in \mathcal{Q}_h\} = \{\mathbf{v}_h \in \mathbf{V}_h : \operatorname{div} \mathbf{v}_h = 0 \text{ in } \Omega\},$$

and relying on the inf-sup condition (3.19), we can introduce an equivalent discrete reduce problem.

Let us denote by $\mathcal{I}_h : C(\bar{\Omega}) \rightarrow \mathcal{M}_h$ the classical nodal interpolation operator with respect to a uni-solvent set of Lagrangian interpolation nodes associated with the conforming space \mathcal{M}_h . By $\Pi_h \mathbf{u}$ we denote the BDM projection of \mathbf{u} , and $\mathcal{L}_h p$ is the L^2 -projection of p onto \mathcal{Q}_h . Under adequate regularity assumptions, the following approximation properties hold (see [29]):

$$\begin{aligned} \|\mathbf{u} - \Pi_h \mathbf{u}\|_{1,\mathcal{T}_h} &\leq C^* h^{k+1} \|\mathbf{u}\|_{k+1,\Omega}, \\ \|c - \mathcal{I}_h c\|_{1,\Omega} &\leq C^* h^k \|c\|_{k+1,\Omega}, \quad \|p - \mathcal{L}_h p\|_{0,\Omega} \leq C^* h^k \|p\|_{k,\Omega}. \end{aligned} \quad (3.21)$$

The following development follows the structure adopted in [1].

Lemma 3.2. Assume that $\mathbf{u} \in \mathbf{H}^2(\Omega)$, $p \in L^2(\Omega)$ and $c \in H^1(\Omega)$. Then we have

For all $\mathbf{v} \in \mathbf{V}_h$, $q \in \mathcal{Q}_h$ and $l \in \mathcal{M}_h$:

$$\begin{aligned} (\partial_t \mathbf{u}(t), \mathbf{v})_\Omega + a_1^h(c(t); \mathbf{u}(t), \mathbf{v}) + c_1^h(\mathbf{u}(t); \mathbf{u}(t), \mathbf{v}) - b(\mathbf{v}, p(t)) - \mathbf{F}_g(c(t), \mathbf{v}) - \mathbf{F}_r(\mathbf{u}(t), \mathbf{v}) &= 0, \\ b(\mathbf{u}(t), q) &= 0, \\ (\partial_t c(t), l)_\Omega + a_2(c(t); c(t), l) + c_2(\mathbf{u}(t); c(t), l) - d_2(c(t), l) &= -G_r(c(t), l). \end{aligned}$$

Proof. Since we assume $\mathbf{u} \in \mathbf{H}^2(\Omega)$, integration by parts yields the required result. See also [4]. The third equation is a straightforward result from the continuous form. \square

Now we decompose the errors as follows:

$$\begin{aligned} \mathbf{u}_h - \mathbf{u} &= E_u + \xi_u = (\Pi_h \mathbf{u} - \mathbf{u}) + (\mathbf{u}_h - \Pi_h \mathbf{u}), \\ p_h - p &= E_p + \xi_p = (\mathcal{L}_h p - p) + (p_h - \mathcal{L}_h p), \\ c_h - c &= E_c + \xi_c = (\mathcal{I}_h c - c) + (c_h - \mathcal{I}_h c). \end{aligned}$$

Assuming that $\mathbf{u}_h^0 = \Pi_h \mathbf{u}(0)$ and $c_h^0 = \mathcal{I}_h c(0)$, we will use also the notation $E_u^n = (\mathbf{u}(t_n) - \Pi_h \mathbf{u}(t_n))$ and $\xi_u^n = (\Pi_h \mathbf{u}(t_n) - \mathbf{u}_h^n)$, and similar notation for other variables. Note that for the first time iteration of the fully discrete form of system (3.7) we adopt a backward Euler scheme, and so we require error estimates for this step.

In what follows we assume a simpler form for the drag term \mathbf{f}_r such that for all $\mathbf{u}_1, \mathbf{u}_2, \mathbf{v} \in \mathbf{H}^1(\Omega)$ we have the following Lipschitz continuity:

$$|\mathbf{F}_r(\mathbf{u}_1, \mathbf{v}) - \mathbf{F}_r(\mathbf{u}_2, \mathbf{v})| \leq \tilde{\gamma}_1 \|\mathbf{u}_1 - \mathbf{u}_2\|_{0,\mathcal{B}} \|\mathbf{v}\|_{0,\mathcal{B}}. \quad (3.22)$$

Since $\mathbf{X}_r(s, t)$ is a rigid motion, (3.22) can be achieved, for instance, if we consider

$$\mathbf{f}_r(\mathbf{x}, t) = \beta^* \rho_r \int_{\mathcal{B}} ((\mathbf{u}_r(s) - \mathbf{u}(\mathbf{X}_r(s, t), t)) \cdot \mathbf{n}_r) \mathbf{n}_r \delta(\mathbf{x} - \mathbf{X}_r(s, t)) ds. \quad (3.23)$$

Furthermore, since $\mathcal{B} \subset \Omega$, we have that $\|\cdot\|_{0,\mathcal{B}} \leq \|\cdot\|_{0,\Omega}$ and

$$|\mathbf{F}_r(\mathbf{u}_1, \mathbf{v}) - \mathbf{F}_r(\mathbf{u}_2, \mathbf{v})| \leq \gamma_1 \|\mathbf{u}_1 - \mathbf{u}_2\|_{0,\Omega} \|\mathbf{v}\|_{0,\Omega}. \quad (3.24)$$

By Hölder's inequality for all $c, c_1, c_2, l \in H^1(\Omega)$ and $\mathbf{v} \in \mathbf{H}^1(\Omega)$ there also hold

$$\mathbf{F}_g(c, \mathbf{v}) \leq \gamma_2 \|c\|_{0,\Omega} \|\mathbf{v}\|_{0,\Omega}, \quad (3.25)$$

$$G_r(c_1, l) - G_r(c_2, l) \leq \gamma_3 \|c_1 - c_2\|_{0,\Omega} \|l\|_{0,\Omega}. \quad (3.26)$$

The following algebraic relation will be useful in the sequel: for any real numbers a^{n+1}, a^n, a^{n-1} and defining $\Lambda a^n := a^{n+1} - 2a^n + a^{n-1}$, we have

$$2(3a^{n+1} - 4a^n + a^{n-1}, a^n) = |a^{n+1}|^2 + |2a^{n+1} - a^n|^2 + |\Lambda a^n|^2 - |a^n|^2 - |2a^n - a^{n-1}|^2. \quad (3.27)$$

Theorem 3.1. Let (\mathbf{u}_h^n, c_h^n) in $\mathbf{X}_h \times \mathcal{M}_h$ be a solution of problem (3.7), using the second-order backward differentiation formula (BDF2) with initial data (\mathbf{u}_h^1, c_h^1) and (\mathbf{u}_h^0, c_h^0) . Then there exist constants $\tilde{C}_u > 0$ and $\tilde{C}_c > 0$ that are independent of h and τ such that

$$\sup_{2 \leq n \leq N} \|\mathbf{u}_h^n\|_{0,\Omega}^2 + \sup_{2 \leq n \leq N} \|2\mathbf{u}_h^n - \mathbf{u}_h^{n-1}\|_{0,\Omega}^2 + \sum_{n=2}^N \|\Lambda \mathbf{u}_h^{n-1}\|_{0,\Omega} + \sum_{n=2}^N \tau \tilde{\alpha}_a \|\mathbf{u}_h^n\|_{1,\mathcal{T}_h}^2$$

$$\begin{aligned}
&\leq \bar{C}_u(\|c_h^1\|_{0,\Omega}^2 + \|2c_h^1 - c_h^0\|_{0,\Omega}^2 + \|\mathbf{u}_h^1\|_{0,\Omega}^2 + \|2\mathbf{u}_h^1 - \mathbf{u}_h^0\|_{0,\Omega}^2 + \|\mathbf{u}_\tau\|_{0,B}^2 + |c_\tau|^2), \\
&\quad \sup_{2 \leq n \leq N} \|c_h^n\|_{0,\Omega}^2 + \sup_{2 \leq n \leq N} \|2c_h^n - c_h^{n-1}\|_{0,\Omega}^2 + \sum_{n=2}^N \|Ac_h^{n-1}\|_{0,\Omega} + 4 \sum_{n=2}^N \tau \hat{\alpha}_a \|c_h^n\|_{1,\Omega}^2 \\
&\leq \bar{C}_c(\|c_h^1\|_{0,\Omega}^2 + \|2c_h^1 - c_h^0\|_{0,\Omega}^2 + |c_\tau|^2).
\end{aligned}$$

Proof. It suffices to take $\mathbf{v}_h = 4\tau\mathbf{u}_h^{n+1}$ and $l_h = 4\tau c_h^{n+1}$ in system (3.7), using BDF2 differentiation formula, Sobolev inequalities, summing over n from 1 to $n \leq N-1$, and applying Gronwall's lemma, with τ sufficiently small. Note that by Remark 3.1, all terms containing the bilinear form b are simply removed from the system. \square

Theorem 3.2. *Let us assume that $\mathbf{u} \in L^\infty(0, T; H_0^{k+1}(\Omega))$, $\mathbf{u}' \in L^\infty(0, T; \mathbf{H}^1(\Omega))$, $\mathbf{u}'' \in L^\infty(0, T; \mathbf{L}^2(\Omega))$, $p \in L^\infty(0, T; H^k(\Omega))$, $c \in L^\infty(0, T; H_0^{k+1}(\Omega))$, $c' \in L^\infty(0, T; H^k(\Omega))$, $c'' \in L^\infty(0, T; L^2(\Omega))$, with $\gamma_2^2 \leq \frac{1}{32}\hat{\alpha}_a\tilde{\alpha}_a^2$, $k \geq 1$ and also that*

$$\max\{\|\mathbf{u}\|_{L^\infty(0,T;\mathbf{W}^{1,\infty}(\Omega))}, \|c\|_{L^\infty(0,T;W^{1,\infty}(\Omega))}\} < M,$$

for a sufficiently small constant $M > 0$ (a precise condition for M , can be found on Theorem 3.5). Then there exist positive constants C_u^1, C_c^1 , independent of h and τ , such that

$$\frac{1}{4}\|\xi_u^1\|_{0,\Omega}^2 + \frac{1}{4}\tau\tilde{\alpha}_a\|\xi_u\|_{1,\mathcal{T}_h}^2 \leq C_u^1(h^{2k} + \tau^4), \quad \frac{1}{8}\|\xi_c^1\|_{0,\Omega}^2 + \frac{1}{4}\tau\hat{\alpha}_a\|\xi_c\|_{H^1(\Omega)}^2 \leq C_c^1(h^{2k} + \tau^4).$$

Proof. First, taking into account the regularity assumptions for \mathbf{u} , we have for all \mathbf{x} a $\gamma \in (0, 1)$ that depends on \mathbf{x} such that

$$\mathbf{u}(0) = \mathbf{u}(\tau) - \tau\mathbf{u}'(\tau) + \frac{1}{2}\tau^2\mathbf{u}''(\tau\gamma),$$

then using the reduced problem as stated on Remark 3.1, \mathbf{u} satisfies the following error equation

$$\begin{aligned}
\|\xi_u^1\|_{0,\Omega}^2 + \tau\tilde{\alpha}_a\|\xi_u^1\|_{1,\mathcal{T}_h}^2 &\leq -(I_h\mathbf{u}(\tau) - \mathbf{u}(\tau) + \mathbf{u}_h^0 - \mathbf{u}(0), \xi_u^1)_\Omega \\
&\quad + \tau(a_1^h(c_h^1; I_h\mathbf{u}(\tau), \xi_u^1) - a_1^h(c^1; \mathbf{u}(\tau), \xi_u^1)) \\
&\quad - \tau(c_1^h(\mathbf{u}_h^1; \mathbf{u}_h^1, \xi_u^1) - c_1^h(\mathbf{u}(\tau), \mathbf{u}(\tau), \xi_u^1)) - \tau(\mathbf{F}_\tau(\mathbf{u}_h^1, \xi_u^1) - \mathbf{F}_\tau(\mathbf{u}(\tau), \xi_u^1)) \\
&\quad - \tau(\mathbf{F}_g(c_h^1, \xi_u^1) - \mathbf{F}_g(c(\tau), \xi_u^1)) - \frac{\tau^2}{2}(\mathbf{u}''(\tau\gamma), \xi_u^1),
\end{aligned}$$

which results after choosing ξ_u^1 as test function in the first equation of Lemma 3.2 and system (3.7), performing an Euler scheme step, subtracting both equations, and adding $\pm a_1^h(c_h^1; I_h\mathbf{u}(\tau), \xi_u^1)$. Now, by applying the error approximation results from (3.21), Young's inequality, and the stability properties, we get

$$\begin{aligned}
\frac{1}{4}\|\xi_u^1\|_{0,\Omega}^2 + \frac{1}{4}\tau\tilde{\alpha}_a\|\xi_u^1\|_{1,\mathcal{T}_h}^2 &\leq Ch^{2k}\tau\left(\|\mathbf{u}(\tau)\|_{\mathbf{H}^{k+1}(\Omega)}^2 + \|\mathbf{u}(0)\|_{\mathbf{H}^{k+1}(\Omega)}^2 + \|c(\tau)\|_{H^{k+1}(\Omega)}^2 + \|p(\tau)\|_{H^k(\Omega)}^2\right) \\
&\quad + C\tau^4(\|\mathbf{u}''\|_{L^\infty(0,T;\mathbf{L}^2(\Omega))}^2) + \frac{4\tilde{C}_{\text{Lip}}^2M^2}{\tilde{\alpha}_a}\tau\|\xi_c^1\|_{1,\Omega}^2 + \tau\frac{\gamma_2^2}{\tilde{\alpha}_a}\|\xi_c^1\|_{1,\Omega}^2. \quad (3.28)
\end{aligned}$$

Next we follow the same steps for c , with τ sufficiently small ($\tau \leq \frac{1}{2(12\tilde{C}_a^2 + 2\tilde{\gamma}_3^2)}$) to obtain

$$\begin{aligned}
\frac{1}{4}\|\xi_c^1\|_{0,\Omega}^2 + \frac{1}{2}\tau\hat{\alpha}_a\|\xi_c^1\|_{1,\Omega}^2 &\leq C\tau h^{2k}\left(\|\mathbf{u}(\tau)\|_{\mathbf{H}^{k+1}(\Omega)}^2 + \|c(\tau)\|_{H^{k+1}(\Omega)}^2 + \|c(0)\|_{H^{k+1}(\Omega)}^2\right) \\
&\quad + \|c(\tau)\|_{H^{k+1}(\Omega)}^2\|\mathbf{u}(\tau)\|_{H^1(\Omega)}^2 + \|\mathbf{u}(\tau)\|_{H^{k+1}(\Omega)}^2\|c(\tau)\|_{H^1(\Omega)}^2 \\
&\quad + C\tau^4(\|c''\|_{L^\infty(0,\tau;L^2(\Omega))}^2) + \frac{6\tilde{C}_1^2(1+C^*)^2M^2}{\hat{\alpha}_a}\tau\|\xi_u\|_{1,\mathcal{T}_h}^2. \quad (3.29)
\end{aligned}$$

In this way, from (3.28) we deduce that

$$\tau \|\xi_{\mathbf{u}}\|_{1, \mathcal{T}_h}^2 \leq C(h^{2k} + \tau^4) + \frac{16\tilde{C}_{\text{Lip}}^2 M^2}{\tilde{\alpha}_a^2} \tau \|\xi_c^1\|_{1, \Omega}^2 + 4\frac{\gamma_2^2}{\tilde{\alpha}_a^2} \tau \|\xi_c^1\|_{1, \Omega}^2.$$

We insert the previous identity into (3.29) and consider M sufficiently small such that the terms multiplying $\|\xi_c^1\|_{1, \Omega}^2$, can be absorbed into the left-hand side of the inequality, to get

$$\frac{1}{8} \|\xi_c^1\|_{0, \Omega}^2 + \frac{1}{4} \tau \hat{\alpha}_a \|\xi_c\|_{1, \Omega}^2 \leq C_c^1 (h^{2k} + \tau^4). \quad (3.30)$$

The first estimate follows by directly substituting (3.30) into (3.28). \square

Theorem 3.3. *Let (\mathbf{u}, p, c) be the solution of (2.6) and (\mathbf{u}_h, p_h, c_h) be the solution of (3.7) with BDF2 iteration. Suppose that $\mathbf{u} \in L^\infty(0, T; \mathbf{H}_0^{k+1}(\Omega))$, $c \in L^\infty(0, T; H_0^{k+1}(\Omega))$, $\mathbf{u}' \in L^\infty(0, T; \mathbf{H}^k(\Omega))$, $\mathbf{u}^{(3)} \in L^2(0, T; \mathbf{L}^2(\Omega))$ and $\|\mathbf{u}\|_{L^\infty(0, T; \mathbf{W}^{1, \infty}(\Omega))} < M$ for a sufficiently small constant $M > 0$. Then there exist positive constants $C, \eta_1 \geq 0$ independent of h and τ such that for all $m + 1 \leq N$,*

$$\|\xi_{\mathbf{u}}^{m+1}\|_{0, \Omega}^2 + \|2\xi_{\mathbf{u}}^{m+1} - \xi_{\mathbf{u}}^m\|_{0, \Omega}^2 + \sum_{n=1}^m \|A\xi_{\mathbf{u}}^n\|_{0, \Omega}^2 + \sum_{n=1}^m \tau \tilde{\alpha}_a \|\xi_{\mathbf{u}}^{n+1}\|_{1, \mathcal{T}_h}^2 \leq C(\tau^4 + h^{2k}) + \sum_{n=1}^m \eta_1 \tau \|\xi_c^{n+1}\|_{0, \Omega}^2.$$

Proof. We choose as tests functions $\mathbf{v}_h = \xi_{\mathbf{u}}^{n+1}$ in the first equation of (3.7), using BDF2 differentiation formula and inserting the terms

$$\pm \frac{1}{2\tau} (3\mathbf{u}(t_{n+1}) - 4\mathbf{u}(t_n) + \mathbf{u}(t_{n-1}), \xi_{\mathbf{u}}^{n+1})_{\Omega}, \quad \pm \frac{1}{2\tau} (3\Pi_h \mathbf{u}(t_{n+1}) - 4\Pi_h \mathbf{u}(t_n) + \Pi_h \mathbf{u}(t_{n-1}), \xi_{\mathbf{u}}^{n+1})_{\Omega},$$

and $\pm a_1^h(c_h^{n+1}; \Pi_h \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1})$, we get

$$\begin{aligned} & \frac{1}{2\tau} (3\xi_{\mathbf{u}}^{n+1} - 4\xi_{\mathbf{u}}^n + \xi_{\mathbf{u}}^{n-1}, \xi_{\mathbf{u}}^{n+1})_{\Omega} + \frac{1}{2\tau} (3E_{\mathbf{u}}^{n+1} - 4E_{\mathbf{u}}^n + E_{\mathbf{u}}^{n-1}, \xi_{\mathbf{u}}^{n+1})_{\Omega} \\ & + \frac{1}{2\tau} (3\mathbf{u}(t_{n+1}) - 4\mathbf{u}(t_n) + \mathbf{u}(t_{n-1}), \xi_{\mathbf{u}}^{n+1})_{\Omega} + a_1^h(c_h^{n+1}; \xi_{\mathbf{u}}^{n+1}, \xi_{\mathbf{u}}^{n+1}) + a_1^h(c_h^{n+1}; \Pi_h \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1}) \\ & + c_1^h(\mathbf{u}_h^{n+1}, \mathbf{u}_h^{n+1}, \xi_{\mathbf{u}}^{n+1}) = \mathbf{F}_g(c_h^{n+1}, \xi_{\mathbf{u}}^{n+1}) + \mathbf{F}_r(\mathbf{u}_h^{n+1}, \xi_{\mathbf{u}}^{n+1}). \end{aligned} \quad (3.31)$$

Considering Lemma 3.2 at $t = t_{n+1}$ with $\mathbf{v} = \xi_{\mathbf{u}}^{n+1}$, and after inserting the term

$$\pm \frac{1}{2\tau} (3\mathbf{u}(t_{n+1}) - 4\mathbf{u}(t_n) + \mathbf{u}(t_{n-1}), \xi_{\mathbf{u}}^{n+1})_{\Omega},$$

we readily deduce the expression

$$\begin{aligned} & \frac{1}{2\tau} (3\mathbf{u}(t_{n+1}) - 4\mathbf{u}(t_n) + \mathbf{u}(t_{n-1}), \xi_{\mathbf{u}}^{n+1})_{\Omega} + a_1^h(c(t_{n+1}); \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1}) + c_1^h(\mathbf{u}(t_{n+1}), \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1}) \\ & = \mathbf{F}_g(c^{n+1}, \xi_{\mathbf{u}}^{n+1}) + \mathbf{F}_r(\mathbf{u}^{n+1}, \xi_{\mathbf{u}}^{n+1}) - \left(\mathbf{u}'(t_{n+1}) - \frac{3\mathbf{u}(t_{n+1}) - 4\mathbf{u}(t_n) + \mathbf{u}(t_{n-1})}{2\tau}, \xi_{\mathbf{u}}^{n+1} \right)_{\Omega}. \end{aligned} \quad (3.32)$$

We can then subtract (3.31) from (3.32) and multiply both sides by 4τ to obtain an equality

$$I_1 + I_2 = I_3 + I_4 + I_5 + I_6 + I_7 + I_8,$$

where we define

$$I_1 := 2(3\xi_{\mathbf{u}}^{n+1} - 4\xi_{\mathbf{u}}^n + \xi_{\mathbf{u}}^{n-1}, \xi_{\mathbf{u}}^{n+1}), \quad I_2 := 4\tau a_1^h(c_h^{n+1}; \xi_{\mathbf{u}}^{n+1}, \xi_{\mathbf{u}}^{n+1}),$$

$$\begin{aligned}
I_3 &:= 4\tau \left(\mathbf{u}'(t_{n+1}) - \frac{3\mathbf{u}(t_{n+1}) - 4\mathbf{u}(t_n) + \mathbf{u}(t_{n-1}))}{2\tau}, \xi_{\mathbf{u}}^{n+1} \right)_{\Omega}, \quad I_4 := -2 \left(3E_{\mathbf{u}}^{n+1} - 4E_{\mathbf{u}}^n + E_{\mathbf{u}}^{n-1}, \xi_{\mathbf{u}}^{n+1} \right), \\
I_5 &:= 4\tau \left(\mathbf{F}_g(c_h^{n+1}, \xi_{\mathbf{u}}^{n+1}) - \mathbf{F}_g(c(t_{n+1}), \xi_{\mathbf{u}}^{n+1}), \quad I_6 := 4\tau \left(\mathbf{F}_r(\mathbf{u}_h^{n+1}, \xi_{\mathbf{u}}^{n+1}) - \mathbf{F}_r(\mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1}), \right. \\
I_7 &:= -4\tau \left(a_1^h(c_h^{n+1}; \Pi_h \mathbf{u}^{n+1}, \xi_{\mathbf{u}}^{n+1}) - a_1^h(c(t_{n+1}); \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1}), \right. \\
I_8 &:= -4\tau \left(c_1^h(\mathbf{u}_h^{n+1}, \mathbf{u}_h^{n+1}, \xi_{\mathbf{u}}^{n+1}) - c_1^h(\mathbf{u}(t_{n+1}), \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1}). \right.
\end{aligned}$$

Let us estimate each term $I_i, i \in \{1, \dots, 8\}$. For I_1 , using (3.27) we can assert that

$$I_1 = \|\xi_{\mathbf{u}}^{n+1}\|_{0,\Omega}^2 + \|2\xi_{\mathbf{u}}^{n+1} - \xi_{\mathbf{u}}^n\|_{0,\Omega}^2 + \|A\xi_{\mathbf{u}}^{n+1}\|_{0,\Omega}^2 - \|\xi_{\mathbf{u}}^n\|_{0,\Omega}^2 - \|2\xi_{\mathbf{u}}^n - \xi_{\mathbf{u}}^{n-1}\|_{0,\Omega}^2.$$

Using the ellipticity stated in (3.14), we readily get

$$I_2 \geq 4\tau\tilde{\alpha}_a \|\xi_{\mathbf{u}}^{n+1}\|_{1,\mathcal{T}_h}^2.$$

By using Taylor's formula with integral remainder we have

$$\left| \mathbf{u}'(t_{n+1}) - \frac{3\mathbf{u}(t_{n+1}) - 4\mathbf{u}(t_n) + \mathbf{u}(t_{n-1}))}{2\tau} \right| = \frac{\tau^{3/2}}{2\sqrt{3}} \|\mathbf{u}^{(3)}\|_{L^2(t_{n-1}, t_{n+1}; L^2(\Omega))},$$

then by combining Cauchy-Schwarz and Young's inequality, we obtain the bound

$$|I_3| \leq \frac{\tau^4}{24\varepsilon_1} \|\mathbf{u}^{(3)}\|_{L^2(t_{n-1}, t_{n+1}; L^2(\Omega))}^2 + \frac{\tau\varepsilon_1}{2} \|\xi_{\mathbf{u}}^{n+1}\|_{1,\mathcal{T}_h}^2.$$

Now we insert $\pm 4\tau E'_{\mathbf{u}}(t_{n+1})$ onto the fourth term, which leads to

$$I_4 = -4\tau \left(E'_{\mathbf{u}}(t_{n+1}), \xi_{\mathbf{u}}^{n+1} \right)_{\Omega} + \left(E'_{\mathbf{u}}(t_{n+1}) - \frac{3E_{\mathbf{u}}^{n+1} - 4E_{\mathbf{u}}^n + E_{\mathbf{u}}^{n-1}}{2\tau}, \xi_{\mathbf{u}}^{n+1} \right)_{\Omega}.$$

Proceeding as before and using (3.21) on the first term of I_4 , we get

$$|I_4| \leq \frac{C}{2\varepsilon_2} h^{2k} \|\mathbf{u}'\|_{L^\infty(0,T; \mathbf{H}^k(\Omega))}^2 + \frac{\tau\varepsilon_2}{2} \|\xi_{\mathbf{u}}^{n+1}\|_{1,\mathcal{T}_h}^2 + \frac{\tau^4 C}{2\varepsilon_3} \|\mathbf{u}^{(3)}\|_{L^2(0,T; L^2(\Omega))}^2 + \frac{\tau\varepsilon_3}{2} \|\xi_{\mathbf{u}}^{n+1}\|_{1,\mathcal{T}_h}^2.$$

Now by (3.25), appealing to (3.21), and inserting $\pm 4\tau \mathbf{F}_g(\mathcal{I}_h c^{n+1}, \xi_{\mathbf{u}}^{n+1})$, we are left with

$$|I_5| \leq \frac{2\gamma_2^2 \tau}{\varepsilon_4} \left(C^* h^{2k} \|c\|_{L^\infty(0,T; \mathbf{H}^k(\Omega))}^2 + \|\xi_c^{n+1}\|_{0,\Omega}^2 \right) + 2\tau\varepsilon_4 \|\xi_{\mathbf{u}}^{n+1}\|_{1,\mathcal{T}_h}^2.$$

In the same manner using (3.24), and inserting $\pm 4\tau \mathbf{F}_r(\Pi_h \mathbf{u}^{n+1}, \xi_{\mathbf{u}}^{n+1})$, we get

$$|I_6| \leq \frac{2\gamma_1^2 \tau}{\varepsilon_5} \left(C^* h^{2k} \|\mathbf{u}\|_{L^\infty(0,T; \mathbf{H}^k(\Omega))}^2 + \|\xi_{\mathbf{u}}\|_{0,\Omega}^2 \right) + 2\tau\varepsilon_5 \|\xi_{\mathbf{u}}^{n+1}\|_{1,\mathcal{T}_h}^2.$$

Again inserting $\pm a_1^h(c_h^{n+1}; \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1})$ and $\pm a_1^h(\mathcal{I}_h c^{n+1}; \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1})$ and using (3.21) we get

$$\begin{aligned}
|I_7| &\leq \frac{\tilde{C}_a^2 \tau h^{2k}}{2\varepsilon_6} \|\mathbf{u}\|_{L^\infty(0,T; \mathbf{H}^{k+1}(\Omega))}^2 + \frac{\tau\varepsilon_6}{2} \|\xi_{\mathbf{u}}^{n+1}\|_{1,\mathcal{T}_h}^2 + \frac{\tilde{C}_{\text{lip}}^2 M^2}{2\varepsilon_7} \|\xi_c\|_{1,\Omega}^2 \\
&\quad + \frac{\tau}{2} \varepsilon_7 \|\xi_{\mathbf{u}}^{n+1}\|_{1,\mathcal{T}_h}^2 + \frac{\tilde{C}_{\text{lip}}^2 M^2 \tau h^{2k}}{2\varepsilon_8} \|c\|_{L^\infty(0,T; \mathbf{H}^k(\Omega))}^2 + \frac{\varepsilon_8 \tau}{2} \|\xi_{\mathbf{u}}^{n+1}\|_{1,\mathcal{T}_h}^2.
\end{aligned}$$

Now we insert into I_8 the three terms

$$\pm c_1^h(\mathbf{u}(t_{n+1}), \Pi_h \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1}), \quad \pm c_1^h(\Pi_h \mathbf{u}(t_{n+1}), \Pi_h \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1}),$$

$$\pm c_1^h(\Pi_h \mathbf{u}(t_{n+1}), \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1}),$$

which yields

$$\begin{aligned} I_8 = & -4\tau(c_1^h(\mathbf{u}(t_{n+1}), \Pi_h \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1}) - c_1^h(\Pi_h \mathbf{u}(t_{n+1}), \Pi_h \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1}) \\ & + c_1^h(\Pi_h \mathbf{u}(t_{n+1}), \Pi_h \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1}) - c_1^h(\Pi_h \mathbf{u}(t_{n+1}), \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1}) \\ & + c_1^h(\Pi_h \mathbf{u}(t_{n+1}), \mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1}) - c_1^h(\mathbf{u}(t_{n+1})\mathbf{u}(t_{n+1}), \xi_{\mathbf{u}}^{n+1}) + c_1^h(\mathbf{u}_h^{n+1}, \xi_{\mathbf{u}}^{n+1}, \xi_{\mathbf{u}}^{n+1})). \end{aligned}$$

The last term is moved to the left-hand side, where we use (3.16); whereas for the remaining terms (which we further rename as \tilde{I}_8), the bound (3.12) together with (3.21) imply that

$$\begin{aligned} |\tilde{I}_8| \leq & 4\tau \left(C^* \tilde{C}_u C_\infty M \|\xi_{\mathbf{u}}^{n+1}\|_{1, \mathcal{T}_h}^2 + \frac{h^{2k} C}{2\varepsilon_9} \|\mathbf{u}\|_{L^\infty(0, T; \mathbf{H}^1(\Omega))}^2 \|\mathbf{u}\|_{L^\infty(0, T; \mathbf{H}^{k+1}(\Omega))}^2 + \frac{\varepsilon_9}{2} \|\xi_{\mathbf{u}}^{n+1}\|_{1, \mathcal{T}_h}^2 \right. \\ & \left. + \frac{C h^{2k}}{2\varepsilon_{10}} \|\mathbf{u}\|_{L^\infty(0, T; \mathbf{H}^{k+1}(\Omega))}^2 \|\mathbf{u}\|_{L^\infty(0, T; \mathbf{H}^1(\Omega))}^2 + \frac{\varepsilon_{10}}{2} \|\xi_{\mathbf{u}}^{n+1}\|_{1, \mathcal{T}_h}^2 \right), \end{aligned}$$

where C^* is a positive constant coming from (3.21). Hence, by choosing $\varepsilon_i = 2\tilde{\alpha}_a/11$ for $i = 1, \dots, 11$, collecting the above estimates, and summing over $1 \leq n \leq m$ for all $m+1 \leq N$ we get

$$\begin{aligned} & \|\xi_{\mathbf{u}}^{m+1}\|_{0, \Omega}^2 + \|2\xi_{\mathbf{u}}^{m+1} - \xi_{\mathbf{u}}^m\|_{0, \Omega}^2 + \sum_{n=1}^m \|A\xi_{\mathbf{u}}^n\|_{0, \Omega}^2 - 3\|\xi_{\mathbf{u}}^1\|_{0, \Omega}^2 + \sum_{n=1}^m \tau \tilde{\alpha}_a \|\xi_{\mathbf{u}}^{n+1}\|_{1, \mathcal{T}_h}^2 \\ & \leq C(\tau^4 + h^{2k}) + \eta_1 \sum_{n=1}^m \|\xi_c^{n+1}\|_{0, \Omega}^2 + \sum_{n=1}^m \frac{11\gamma_1^2 \tau}{\tilde{\alpha}_a} \|\xi_{\mathbf{u}}^{n+1}\|_{0, \Omega}^2, \end{aligned}$$

where $\tilde{C}_u C^* C_\infty M \leq \tilde{\alpha}_a/4$ and $\eta_1 = C(\tilde{\alpha}_a, \tilde{C}_{\text{Lip}}, \gamma_1, \gamma_2)$. Finally, using Theorem 3.2, considering τ sufficiently small and applying Gronwall's lemma, we get the desired result. \square

Theorem 3.4. *Let (\mathbf{u}, c) be the solution of (2.6) and (\mathbf{u}_h, c_h) be the solution of (3.7) using the BDF2 differential operator. If $\mathbf{u} \in L^\infty(0, T; \mathbf{H}_0^{k+1}(\Omega))$, $c \in L^\infty(0, T; H_0^{k+1}(\Omega))$, $c' \in L^\infty(0, T; H^k(\Omega))$, $c^{(3)} \in L^2(0, T; L^2(\Omega))$, and $\|c\|_{L^\infty(0, T; W^{1, \infty}(\Omega))} < M$; then there exist positive constants $C, \eta_2 > 0$, independent of h and τ , such that for all $m+1 \leq N$*

$$\begin{aligned} & \|\xi_c^{m+1}\|_{0, \Omega}^2 + \|2\xi_c^{m+1} - \xi_c^m\|_{0, \Omega}^2 + \sum_{n=1}^m \|A\xi_c^{n+1}\|_{0, \Omega}^2 + \sum_{n=1}^m \tau \hat{\alpha}_a \|\xi_c^{n+1}\|_{1, \Omega}^2 \\ & \leq C(\tau^4 + h^{2k}) + \sum_{n=1}^m \eta_2 \tau \|\xi_{\mathbf{u}}^{n+1}\|_{1, \mathcal{T}_h}^2. \end{aligned}$$

Proof. Proceeding similarly as in the proof of Theorem 3.3, from the second equation of (2.6) we get

$$\begin{aligned} & \frac{1}{2\tau} (3\xi_c^{n+1} - 4\xi_c^n + \xi_c^{n-1}, \xi_c^{n+1})_\Omega + \frac{1}{2\tau} (3E_c^{n+1} - 4E_c^n + E_c^{n-1}, \xi_c^{n+1})_\Omega \\ & + \frac{1}{2\tau} (3c(t_{n+1}) - 4c(t_n) + c(t_{n-1}), \xi_c^{n+1})_\Omega + a_2^h(\xi_c^{n+1}, \xi_c^{n+1}) + a_2^h(\mathcal{I}_h c(t_{n+1}), \xi_c^{n+1}) \\ & + c_2^h(\mathbf{u}_h^{n+1}, c_h^{n+1}, \xi_c^{n+1}) - d_2(c_h^{n+1}, \xi_c^{n+1}) = -G_r(c_h^{n+1}, \xi_c^{n+1}), \end{aligned} \quad (3.33)$$

and considering the third equation in Lemma 3.2, focusing on $t = t_{n+1}$, we immediately obtain

$$\begin{aligned} & \frac{1}{2\tau} (3c(t_{n+1}) - 4c(t_n) + c(t_{n-1}), \xi_c^{n+1})_\Omega + a_2(c(t_{n+1}), \xi_c^{n+1}) + c_2(\mathbf{u}(t_{n+1}), c(t_{n+1}), \xi_c^{n+1}) \\ & - d_2(c^{n+1}, \xi_c^{n+1}) = -G_r(c^{n+1}, \xi_c^{n+1}) - \left(c'(t_{n+1}) - \frac{3c(t_{n+1}) - 4c(t_n) + c(t_{n-1})}{2\tau}, \xi_c^{n+1} \right)_\Omega. \end{aligned} \quad (3.34)$$

Subtracting (3.33) from (3.34) and multiplying both sides of the result by 4τ leads to

$$\begin{aligned}
& 2(3\xi_c^{n+1} - 4\xi_c^n + \xi_c^{n-1}, \xi_c^{n+1})_\Omega + 4\tau a_2(c_h^{n+1}; \xi_c^{n+1}, \xi_c^{n+1}) \\
&= 4\tau \left(c'(t_{n+1}) - \frac{3c(t_{n+1}) - 4c(t_n) + c(t_{n-1}))}{2\tau}, \xi_c^{n+1} \right)_\Omega - 2(3E_c^{n+1} - 4E_c^n + E_c^{n-1}, \xi_c^{n+1})_\Omega \\
&\quad - 4\tau(a_2(c_h^{n+1}; \mathcal{I}_h c^{n+1}, \xi_c^{n+1}) - a_2(c^{n+1}; c^{n+1}, \xi_c^{n+1})) \\
&\quad - 4\tau(c_2(\mathbf{u}_h^{n+1}, c_h^{n+1}, \xi_{\mathbf{u}}^{n+1}) - c_1^h(\mathbf{u}(t_{n+1}), c(t_{n+1}), \xi_{\mathbf{u}}^{n+1})) \\
&\quad + 4\tau(d_2(c_h^{n+1}, \xi_c^{n+1}) - d_2(c^{n+1}, \xi_c^{n+1})) - 4\tau(G_r(c_h^{n+1}, \xi_c^{n+1}) - G_r(c^{n+1}, \xi_c^{n+1})).
\end{aligned} \tag{3.35}$$

As done above, we rewrite (3.35) using auxiliary terms now denoted $\hat{I}_1, \dots, \hat{I}_8$, and derive individual bounds for each term. For the first, second, and third terms, we use (3.27), (3.13), and Taylor expansion together with Young's inequality, respectively, to obtain

$$\begin{aligned}
\hat{I}_1 &= \|\xi_c^{n+1}\|_{0,\Omega}^2 + \|2\xi_c^{n+1} - \xi_c^n\|_{0,\Omega}^2 + \|A\xi_c^{n+1}\|_{0,\Omega}^2 - \|\xi_c^n\|_{0,\Omega}^2 - \|2\xi_c^n - \xi_c^{n-1}\|_{0,\Omega}^2, \\
\hat{I}_2 &\geq 4\tau\hat{\alpha}_a\|\xi_c^{n+1}\|_{1,\Omega}^2, \quad |\hat{I}_3| \leq \frac{\tau^4}{24\varepsilon_1}\|c^{(3)}\|_{L^2(t_{n-1}, t_{n+1}; L^2(\Omega))}^2 + \frac{\tau\varepsilon_1}{2}\|\xi_c^{n+1}\|_{1,\Omega}^2.
\end{aligned}$$

Now we insert $\pm 4\tau E'_c(t_{n+1})$ into \hat{I}_4 and exploit (3.21). This leads to the bound

$$|\hat{I}_4| \leq \frac{C}{2\varepsilon_2}h^{2k}\|c'\|_{L^\infty(0,T;H^k(\Omega))}^2 + \frac{\tau\varepsilon_2}{2}\|\xi_c^{n+1}\|_{1,\Omega}^2 + \frac{\tau^4 C}{2\varepsilon_3}\|c^{(3)}\|_{L^2(0,T;L^2(\Omega))}^2 + \frac{\tau\varepsilon_3}{2}\|\xi_c^{n+1}\|_{1,\Omega}^2.$$

Employing again (3.21) in combination with (3.15) and (3.11), inserting $\pm a_2(c_h^{n+1}; c(t_{n+1}), \xi_c^{n+1})$ and $\pm a_2(\mathcal{I}_h c^{n+1}; c(t_{n+1}), \xi_c^{n+1})$; we have

$$\begin{aligned}
|\hat{I}_5| &\leq \frac{\hat{C}_a^2\tau h^{2k}}{2\varepsilon_4}\|c\|_{L^\infty(0,T;H^{k+1}(\Omega))}^2 + \frac{\tau\varepsilon_4}{2}\|\xi_c^{n+1}\|_{1,\Omega}^2 + \hat{C}_{\text{lip}}M\|\xi_c\|_{1,\Omega}^2 \\
&\quad + \frac{\tilde{C}_{\text{lip}}^2 M^2\tau h^{2k}}{2\varepsilon_5}\|c\|_{L^\infty(0,T;H^k(\Omega))}^2 + \frac{\varepsilon_5\tau}{2}\|\xi_c^{n+1}\|_{1,\Omega}^2.
\end{aligned}$$

In order to derive a bound for \hat{I}_6 we add and subtract the terms

$$\pm c_2(\mathbf{u}(t_{n+1}), \mathcal{I}_h c(t_{n+1}), \xi_c^{n+1}), \quad \pm c_2(\Pi_h \mathbf{u}(t_{n+1}), \mathcal{I}_h c(t_{n+1}), \xi_c^{n+1}), \quad \pm c_2(\Pi_h \mathbf{u}(t_{n+1}), c(t_{n+1}), \xi_c^{n+1}),$$

which yields

$$\begin{aligned}
\hat{I}_6 &= 4\tau(c_2^h(\mathbf{u}_h^{n+1}, \mathcal{I}_h c(t_{n+1}), \xi_c^{n+1}) - c_2(\Pi_h \mathbf{u}(t_{n+1}), \mathcal{I}_h c(t_{n+1}), \xi_c^{n+1}) \\
&\quad + c_2(\Pi_h \mathbf{u}(t_{n+1}), \mathcal{I}_h c(t_{n+1}), \xi_c^{n+1}) - c_2(\Pi_h \mathbf{u}(t_{n+1}), c(t_{n+1}), \xi_c^{n+1}) \\
&\quad + c_2^h(\Pi_h \mathbf{u}(t_{n+1}), c(t_{n+1}), \xi_c^{n+1}) - c_2(\mathbf{u}(t_{n+1}), c(t_{n+1}), \xi_c^{n+1}) + c_2(\mathbf{u}_h^{n+1}, \xi_c^{n+1}, \xi_c^{n+1})).
\end{aligned}$$

Using (3.17), (3.10c) and (3.21), we get

$$\begin{aligned}
|\tilde{I}_6| &\leq 4\tau \left(\frac{\tilde{C}^2 C^*}{2\varepsilon_6}\|\xi_{\mathbf{u}}^{n+1}\|_{1,\mathcal{T}_h}^2\|c\|_{L^\infty(0,T;H^1(\Omega))}^2 + \frac{\varepsilon_6}{2}\|\xi_c\|_{1,\Omega}^2 + \frac{h^{2k}C\tilde{C}^2}{2\varepsilon_7}\|\mathbf{u}\|_{L^\infty(0,T;H^1(\Omega))}^2\|c\|_{L^\infty(0,T;H^{k+1}(\Omega))}^2 \right. \\
&\quad \left. + \frac{\varepsilon_7}{2}\|\xi_c^{n+1}\|_{1,\Omega}^2 + \frac{Ch^{2k}\tilde{C}^2}{2\varepsilon_8}\|\mathbf{u}\|_{L^\infty(0,T;H^{k+1}(\Omega))}^2\|c\|_{L^\infty(0,T;H^1(\Omega))}^2 + \frac{\varepsilon_8}{2}\|\xi_c^{n+1}\|_{1,\Omega}^2 \right).
\end{aligned}$$

Now, using (3.18) and (3.26), we have:

$$|\hat{I}_7| \leq \frac{C_d^2}{\varepsilon_9}2\tau(C^*h^{2k}\|c\|_{L^\infty(0,T;H^k(\Omega))}^2 + \|\xi_c\|_{0,\Omega}^2) + 2\tau\varepsilon_9\|\xi_c^{n+1}\|_{1,\Omega}^2,$$

$$|\hat{J}_8| \leq \frac{\gamma_3^2}{\varepsilon_{10}} 2\tau (C^* h^{2k} \|c\|_{L^\infty(0,T;H^k(\Omega))}^2 + \|\xi_c\|_{0,\Omega}^2) + 2\tau \varepsilon_{10} \|\xi_c^{n+1}\|_{1,\Omega}^2.$$

In this manner, and after choosing $\varepsilon_i = 4\hat{\alpha}_a/25$ for $i = 1, \dots, 8$ and $M \leq \hat{\alpha}_a/\hat{C}_{\text{Lip}}$, we can collect the above estimates and sum over $1 \leq n \leq m$, for all $m+1 \leq N$, to get

$$\begin{aligned} & \|\xi_c^{m+1}\|_{0,\Omega}^2 + \|2\xi_c^{m+1} - \xi_c^m\|_{0,\Omega}^2 + \sum_{n=1}^m \|A\xi_c^n\|_{0,\Omega}^2 + \sum_{n=1}^m \tau \hat{\alpha}_a \|\xi_c^{n+1}\|_{1,\Omega}^2 - 3\|\xi_c^1\|_{0,\Omega}^2 \\ & \leq C(\tau^4 + h^{2k}) + \sum_{n=1}^m \eta_2 \|\xi_{\mathbf{u}}^{n+1}\|_{1,\mathcal{T}_h}^2 + \sum_{n=1}^m \tau \frac{25}{\hat{\alpha}_a} (C_d^2 + \gamma_3^2) \|\xi_c\|_{0,\Omega}^2. \end{aligned}$$

And the proof is completed by considering τ sufficiently small and applying Gronwall's lemma. \square

Theorem 3.5. *Under the assumptions of Theorems 3.3 and 3.4 with*

$$M := \min \left\{ \frac{\tilde{\alpha}_a}{\hat{C}_{\text{Lip}}}, \frac{\tilde{\alpha}_a}{4\tilde{C}_u C^* C_\infty} \right\}$$

there exist positive constants $\hat{\gamma}_u$ and $\hat{\gamma}_c$ independent of τ and h , such that for a sufficiently small τ and all $m+1 \leq N$, the following inequalities hold

$$\begin{aligned} & \left(\|\xi_{\mathbf{u}}^{m+1}\|_{0,\Omega}^2 + \|2\xi_{\mathbf{u}}^{m+1} - \xi_{\mathbf{u}}^m\|_{0,\Omega}^2 + \sum_{n=1}^m \|A\xi_{\mathbf{u}}^n\|_{0,\Omega}^2 + \sum_{n=1}^m \tau \tilde{\alpha}_a \|\xi_{\mathbf{u}}^{n+1}\|_{1,\mathcal{T}_h}^2 \right)^{1/2} \leq \hat{\gamma}_u (\tau^2 + h^k), \\ & \left(\|\xi_c^{m+1}\|_{0,\Omega}^2 + \|2\xi_c^{m+1} - \xi_c^m\|_{0,\Omega}^2 + \sum_{n=1}^m \|A\xi_c^n\|_{0,\Omega}^2 + \sum_{n=1}^m \tau \hat{\alpha}_a \|\xi_c^{n+1}\|_{1,\Omega}^2 \right)^{1/2} \leq \hat{\gamma}_c (\tau^2 + h^k). \end{aligned}$$

Proof. From Theorem 3.3 we have the estimate

$$\sum_{n=1}^m \tau \|\xi_{\mathbf{u}}^{n+1}\|_{1,\mathcal{T}_h}^2 \leq C(\tau^4 + h^{2k}) + \frac{\eta_1}{\tilde{\alpha}_a} \sum_{n=1}^m \tau \|\xi_c^{n+1}\|_{0,\Omega}^2,$$

which, substituting back into Theorem 3.4, yields

$$\begin{aligned} & \|\xi_c^{m+1}\|_{0,\Omega}^2 + \|2\xi_c^{m+1} - \xi_c^m\|_{0,\Omega}^2 + \sum_{n=1}^m \|A\xi_c^n\|_{0,\Omega}^2 + \sum_{n=1}^m \tau \hat{\alpha}_a \|\xi_c^{n+1}\|_{1,\Omega}^2 \\ & \leq C(\tau^4 + h^{2k}) + \frac{\eta_1 \eta_2}{\tilde{\alpha}_a} \sum_{n=1}^m \tau \|\xi_c^{n+1}\|_{0,\Omega}^2. \end{aligned}$$

For the last term on the right-hand side of this last bound we have

$$\|\xi_c^{m+1}\|_{0,\Omega}^2 \leq 2(\|A\xi_c^m\|_{0,\Omega}^2 + \|2\xi_c^m - \xi_c^{m-1}\|_{0,\Omega}^2),$$

and considering τ sufficiently small and applying Gronwall's lemma, we readily deduce that

$$\|\xi_c^{m+1}\|_{0,\Omega}^2 + \|2\xi_c^{m+1} - \xi_c^m\|_{0,\Omega}^2 + \sum_{n=1}^m \|A\xi_c^{n+1}\|_{0,\Omega}^2 + \sum_{n=1}^m \tau \hat{\alpha}_a \|\xi_c^{n+1}\|_{1,\Omega}^2 \leq C(\tau^4 + h^{2k}). \quad (3.36)$$

The first bound follow by combining (3.36) and Theorem 3.3. \square

Lemma 3.3. *Under the same assumptions of Theorem 3.5, we have*

$$\left(\sum_{n=1}^m \tau \|p(t_{n+1}) - p_h^{n+1}\|_{0,\Omega}^2 \right)^{1/2} \leq \hat{\gamma}_p(\tau^2 + h^k).$$

Proof. Owing to the inf-sup condition (3.19), there exists a function $\mathbf{w}_h \in \mathbf{X}_h^\perp$ such that

$$b(\mathbf{w}_h, p(t_{n+1}) - p_h^{n+1}) = \|p(t_{n+1}) - p_h^{n+1}\|_{0,\Omega}^2, \quad (3.37)$$

$$\|\mathbf{w}_h\|_{1,\mathcal{T}_h} \leq \frac{1}{\beta} \|p(t_{n+1}) - p_h^{n+1}\|_{0,\Omega}. \quad (3.38)$$

From (3.7) and Lemma 3.2, proceeding as in the proof of Theorem 3.3, we obtain

$$\begin{aligned} \tau b(\mathbf{w}_h, p(t_{n+1}) - p_h^{n+1}) &= -\tau \left(\mathbf{u}'(t_{n+1}) - \frac{3\mathbf{u}_h^{n+1} - 4\mathbf{u}_h^n + \mathbf{u}_h^{n-1}}{2\tau}, \mathbf{w}_h \right)_\Omega \\ &\quad + \tau (a_1^h(c_h^{n+1}; \mathbf{u}_h^{n+1}, \mathbf{w}_h) - a_1^h(c(t_{n+1}); \mathbf{u}(t_{n+1}), \mathbf{w}_h)) \\ &\quad + \tau (c_1^h(\mathbf{u}_h^{n+1}; \mathbf{u}_h^{n+1}, \mathbf{w}_h) - c_1^h(\mathbf{u}(t_{n+1}); \mathbf{u}(t_{n+1}), \mathbf{w}_h)) \\ &\quad + \tau (\mathbf{F}_g(c(t_{n+1}), \mathbf{w}_h) - \mathbf{F}_g(c_h^{n+1}, \mathbf{w}_h)) + \tau (\mathbf{F}_r(\mathbf{u}(t_{n+1}), \mathbf{w}_h) - \mathbf{F}_r(\mathbf{u}_h^{n+1}, \mathbf{w}_h)) \\ &\leq \frac{\tau^2}{2\sqrt{3}} \|\mathbf{u}^{(3)}\|_{L^2(t_{n-1}, t_{n+1}, L^2(\Omega))} \sqrt{\tau} \|\mathbf{w}_h\|_{1,\mathcal{T}_h} \\ &\quad + \tilde{C}_a C^* h^k \tau \|\mathbf{u}\|_{L^\infty(0,T; \mathbf{H}^{k+1}(\Omega))} \|\mathbf{w}_h\|_{1,\mathcal{T}_h} + \tilde{C}_{\text{lip}} M \tau \|\xi_c^{n+1}\|_{1,\Omega} \|\mathbf{w}_h\|_{1,\mathcal{T}_h} \\ &\quad + \tilde{C}_{\text{lip}} \tau M \|\xi_c\|_{1,\Omega} \|\mathbf{w}_h\|_{1,\mathcal{T}_h} + \tau C \tilde{C}_u C^* C_\infty M \|\xi_c\|_{1,\Omega} \|\mathbf{w}_h\|_{1,\mathcal{T}_h} \\ &\quad + \tau C \tilde{C}_u h^k \|\mathbf{u}\|_{L^\infty(0,T; \mathbf{H}^1(\Omega))} \|\mathbf{u}\|_{L^\infty(0,T; \mathbf{H}^{k+1}(\Omega))} \|\mathbf{w}_h\|_{1,\mathcal{T}_h} \\ &\quad + \tau C \tilde{C}_u h^k \|\mathbf{u}\|_{L^\infty(0,T; \mathbf{H}^1(\Omega))} \|\mathbf{u}\|_{L^\infty(0,T; \mathbf{H}^{k+1}(\Omega))} \|\mathbf{w}_h\|_{1,\mathcal{T}_h} \\ &\quad + \gamma_2 \tau h^k C^* \|c\|_{L^\infty(0,T; H^k(\Omega))} \|\mathbf{w}_h\|_{1,\mathcal{T}_h} + \gamma_2 \tau \|\xi_u\|_{0,\Omega} \|\mathbf{w}_h\|_{1,\mathcal{T}_h} \\ &\quad + \gamma_1 \tau h^k C^* \|\mathbf{u}\|_{L^\infty(0,T; \mathbf{H}^k(\Omega))} \|\mathbf{w}_h\|_{1,\mathcal{T}_h} + \gamma_1 \tau \|\xi_u\|_{0,\Omega} \|\mathbf{w}_h\|_{1,\mathcal{T}_h}. \end{aligned}$$

Summing over $1 \leq n \leq m$ for all $m+1 \leq N$ and substituting back into equations (3.37) and (3.38), we obtain

$$\left(\sum_{n=1}^m \tau \|p(t_{n+1}) - p_h^{n+1}\|_{0,\Omega}^2 \right)^{1/2} \leq \frac{C}{\beta} \left((\tau^2 + h^k) + \left(\sum_{n=1}^m \tau \|\xi_c^{n+1}\|_{0,\Omega}^2 \right)^{1/2} + \left(\sum_{n=1}^m \tau \|\xi_u^{n+1}\|_{1,\mathcal{T}_h}^2 \right)^{1/2} \right).$$

The result follows by applying Theorem 3.5. \square

4. Numerical results

In this section we test the performance of the numerical method and produce some typical solutions in operating conditions. Tetrahedral meshes have been constructed using the freely available mesh manipulator GMSH [21], and the implementation of the H(div)-conforming finite element scheme is carried out using the open source finite element library FEniCS [2]. The linear systems encountered at each Newton-Raphson step are solved with the GMRES method preconditioned with AMG. The Newton iterations stop whenever either the absolute or the relative residuals (measured in the ℓ^2 -norm) drop below the fixed tolerance set to 1×10^{-6} . Apart from the main python modules, a dedicated C++ expression is needed to efficiently compile the position of the rake at each time. It depends on the structure dimensions and on the angular velocity.

k	DoF	e_u	rate	e_p	rate	e_s	rate
1	53	0.004507	–	0.291804	–	0.253207	–
	299	0.002783	0.679	0.192100	0.589	0.153518	0.708
	1265	0.001273	1.150	0.096891	1.006	0.073370	1.085
	4634	0.000631	1.017	0.051713	0.911	0.038362	0.941
	17780	0.000308	1.033	0.026853	0.945	0.018841	1.026
2	132	0.001817	–	0.115142	–	0.089672	–
	797	0.000342	2.349	0.032084	1.799	0.018151	2.249
	3427	8.031e-5	2.133	0.007198	2.197	0.003702	2.337
	12702	1.948e-5	2.056	0.002023	1.844	0.000996	1.905
	49157	4.358e-6	2.159	0.000525	1.941	0.000251	1.987

Table 4.1: Spatial accuracy test: experimental errors and convergence rates for the approximate solutions \mathbf{u}_h , p_h and c_h . Values are displayed for schemes with first and second order in space.

τ	\hat{e}_u	rate	\hat{e}_p	rate	\hat{e}_s	rate
2	5.6194	–	0.5069	–	0.4558	–
1	1.5943	1.817	0.1809	1.487	0.0868	2.391
0.5	0.4433	1.847	0.0523	1.789	0.0193	2.167
0.25	0.1153	1.943	0.0135	1.951	0.0046	2.070
0.125	0.0296	1.959	0.0033	2.000	0.0012	1.994

Table 4.2: Time accuracy test: experimental errors and convergence rates for the approximate solutions \mathbf{u}_h , p_h and c_h , computed for each refinement level.

4.1. Numerical verification of convergence

We start with a simple experimental convergence analysis to confirm the error bounds anticipated in Section 3.2. Doing this in a 2D domain suffices, so we consider Ω as a circle of radius one and construct a sequence of successively refined meshes on which we compute errors between the approximate solutions obtained with the H(div)-conforming scheme and the closed-form solutions

$$\mathbf{u} = \sin(t) \begin{pmatrix} \cos(\pi/2x) \sin(\pi/2y) \\ -\sin(\pi/2x) \cos(\pi/2y) \end{pmatrix}, \quad p = (x^4 - y^4) \exp(-t), \quad c = \frac{1}{2} \cos\left(\frac{\pi}{4}|\mathbf{x}|^2\right) \exp(-t),$$

that are used to construct suitable Dirichlet boundary data for velocity and an exact flux for concentration, and manufactured forcing and source terms \mathbf{F}_{ex} and g_{ex} appearing on the right-hand side of the momentum equation and of the concentration mass balance, respectively. As \mathbf{u} is prescribed everywhere on $\partial\Omega$, for sake of uniqueness we impose $p \in L_0^2(\Omega)$ through a Lagrange multiplier approach. We use a constant viscosity $\nu = 0.01$ and diffusivity $D = 1.0$ with \mathbf{f}_r as given in (3.23), $f_{bk}(c) = 1 \times 10^{-2}(1 - c)$ and \mathbf{k} pointing in the radial outwards direction.

We show orders of convergence in the discrete norm $\|\cdot\|_{1,\mathcal{T}_h}$ for the velocity \mathbf{u} , in the L^2 -norm of the error of p , and in the H^1 -norm of the error in c in Table 4.1. For polynomial degrees $k = 1$ and $k = 2$ we observe that the order of convergence predicted by our theory (see Theorem 3.5 and Lemma 3.3) is achieved.

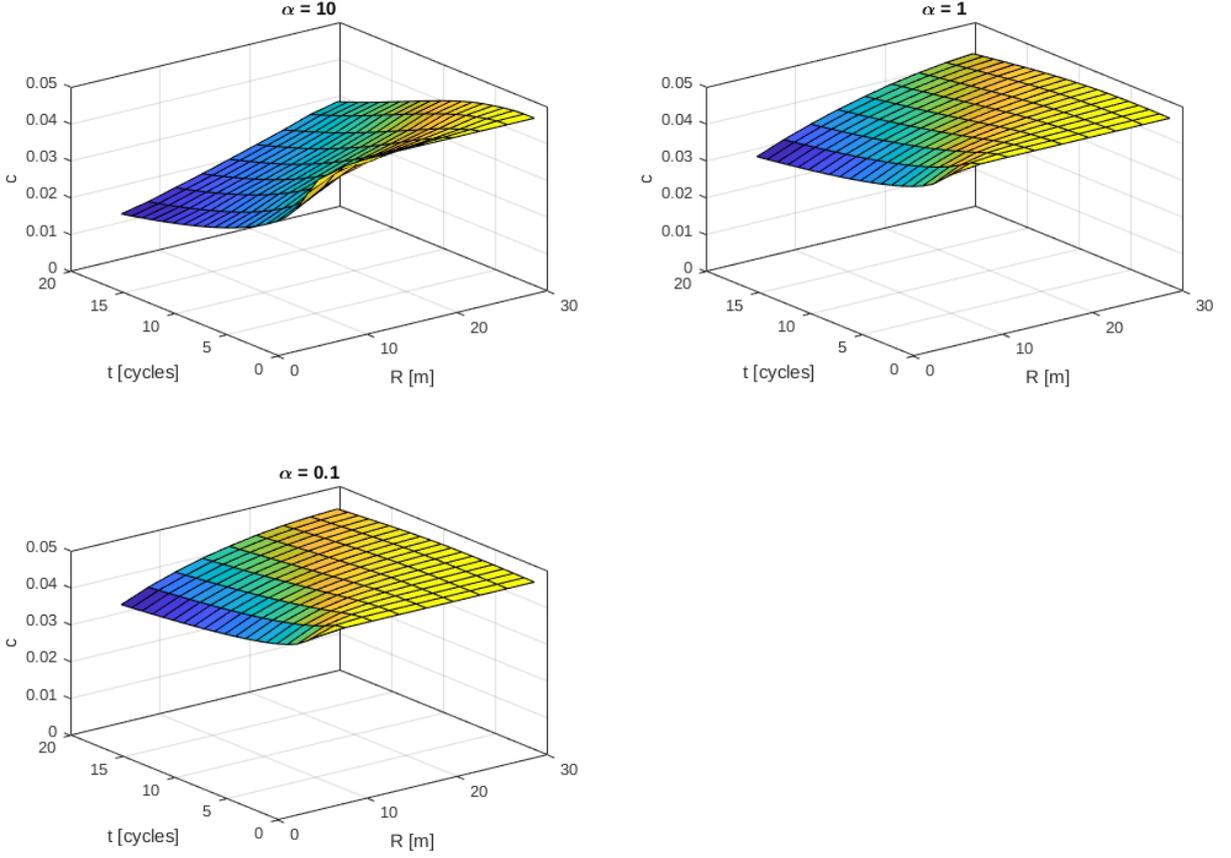


Figure 4.1: Spatio-temporal variation of the average concentration after complete rake cycles at different radius (measured from the centre of the annular domain) and values of α .

Regarding the convergence of the time advancing scheme, now we set $T = 4$ and consider a sequence of uniform refined time partitions $\tau_l, l \in \{1, 2, 3, 4, 5\}$ where the time step is 2^{2-l} . Absolute errors are computed as

$$\hat{e}_{\mathbf{u}} = \left(\sum_{n=1}^m \tau \| \mathbf{u}(t_{n+1}) - \mathbf{u}_h^{n+1} \|_{1, \mathcal{T}_h}^2 \right)^{1/2}, \quad \hat{e}_p = \left(\sum_{n=1}^m \tau \| p(t_{n+1}) - p_h^{n+1} \|_{0, \Omega}^2 \right)^{1/2},$$

$$\hat{e}_c = \left(\sum_{n=1}^m \tau \| c(t_{n+1}) - c_h^{n+1} \|_{1, \Omega}^2 \right)^{1/2},$$

and we readily observe from Table 4.2 that the method converges to the exact solution with the expected second-order rate.

4.2. Preliminary two-dimensional computation

The typical operation conditions on the clarifier unit are characterised by about 1.2 revolutions per hour, a solid concentration behind the rake of 0.01 g/l, a feed flow rate of 10,000 gpm, a return sludge flow rate of 3000 gpm, an effluent flow rate in the overflow weir of approximately 7000 gpm, and a solid concentration at the inlet of 5 g/l (see [16] and the references therein). The specification of the remaining

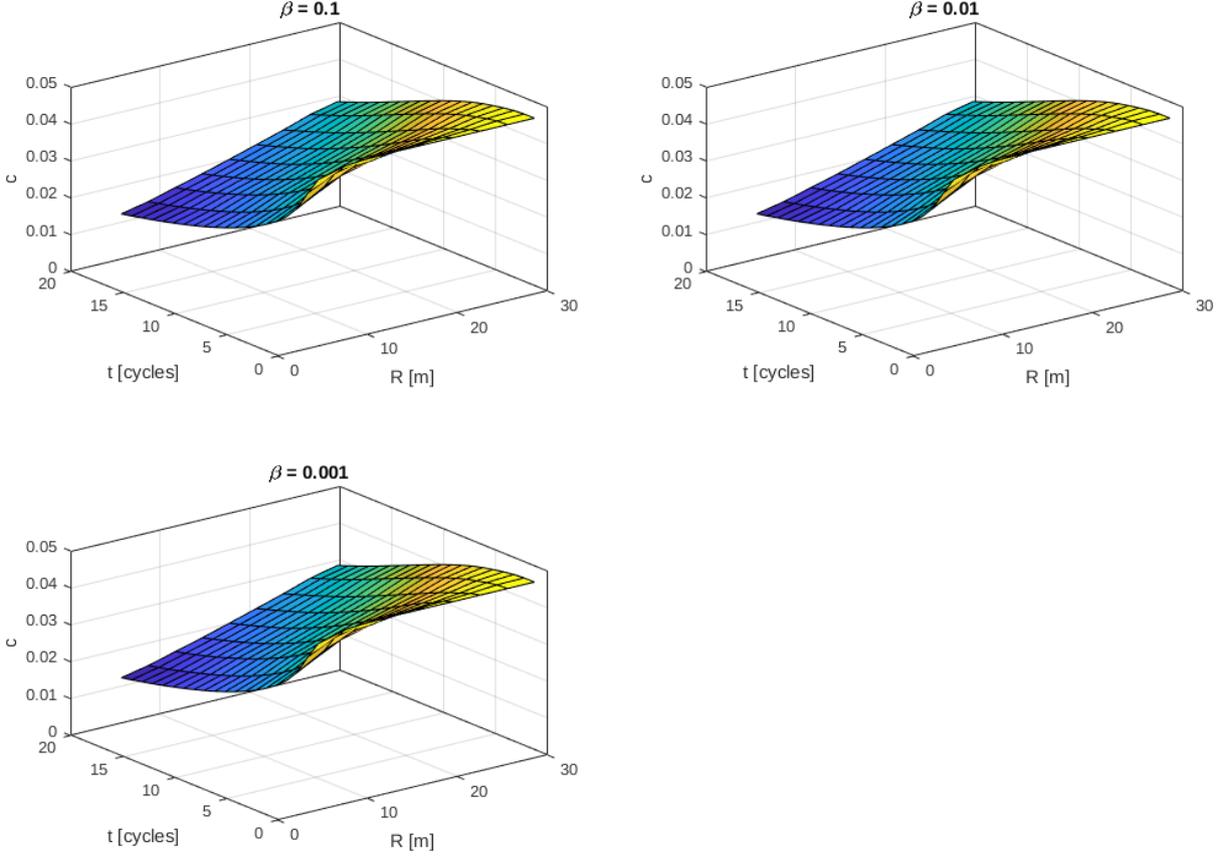


Figure 4.2: Spatio-temporal variation of the average concentration after complete rake cycles at different radius (measured from the centre of the annular domain) and values of β .

model parameters, at least in this specific scenario, are much less clear and we need to characterise them in terms of the expected flow conditions. Known issues in the operation process include a strong backflow into the feedwell, a large recirculation zone near the feedwell, the high velocity of the flow exiting the feedwell, and the lack of flow symmetry.

In order to gain insight into the impact of the rake parameters on the simulation we regard the operation from an azimuthal view and consider only the coupled Navier-Stokes/concentration problem in an annular domain of external radius 30m and internal radius 3m, where one can still see the rotating arm, but the vertical sedimentation is not represented. Here the body force term exerted on the fluid (\mathbf{F}_g) is considered with a radial direction towards the centre of the inner disk. Furthermore the parameters of the simulation are taken as follows:

$$\begin{aligned} \rho_s &= 2500 \text{ [kg/m}^2\text{]}, \quad c_0 = 0.05, \quad \rho_f = 1000 \text{ [kg/m}^2\text{]}, \quad \omega = 1.2 \text{ [rad/min]}, \quad c_r = 1 \times 10^{-3}, \\ g &= 1 \times 10^{-3} \text{ [m/min}^2\text{]}, \quad D_0 = 1.0 \text{ [m}^2\text{/min]}, \quad \nu_0 = 0.05 \text{ [kg/(m min)]}, \\ f_{bk}(c) &= 1.0 \times 10^{-3} c(1-c)^2 \text{ [m/s]}, \quad \sigma_e(c) = \begin{cases} 0 & \text{for } c \leq c_c = 0.07 \\ (50.0/c_c)[(c/0.07)^5 - 1] \text{ [Pa]} & \text{for } c > c_c. \end{cases} \end{aligned}$$

We start the simulation with a homogeneous initial concentration c_0 and then, we observe how this concentration changes over time for different values of the parameters α and β . From results shown in

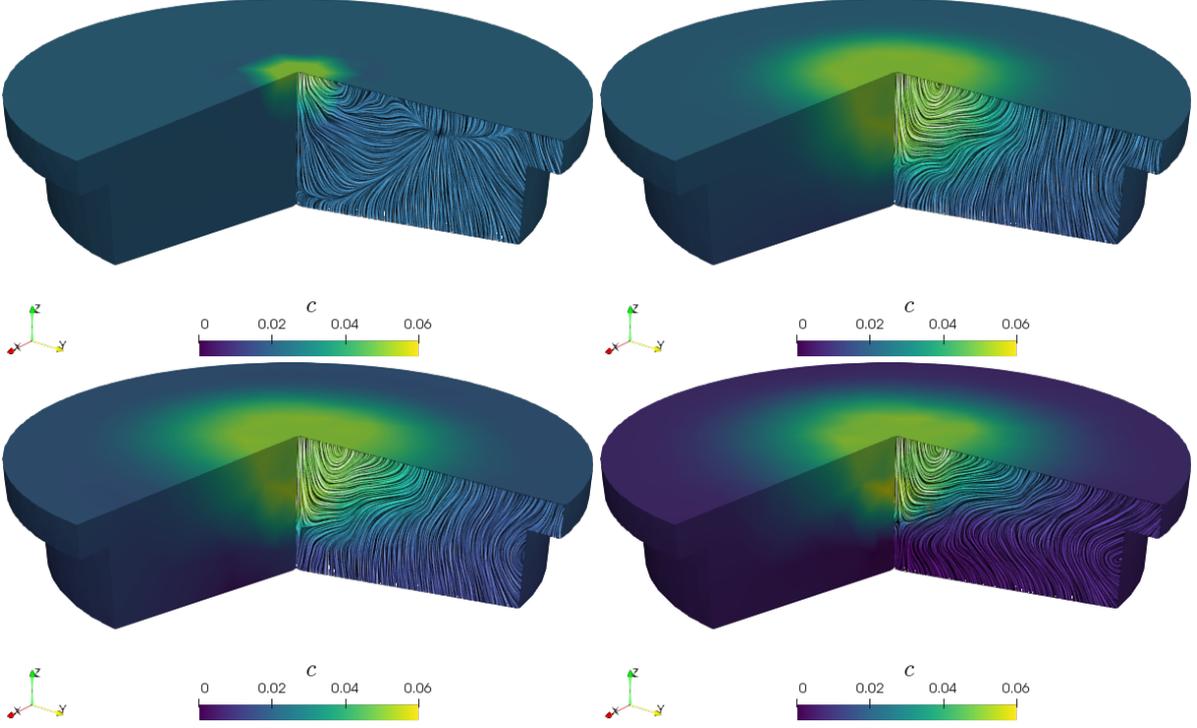


Figure 4.3: Domain cuts showing snapshots of solids concentration and line integral contours of velocity on a slice, focusing on time instants $t = 1, 30, 60$ and 180 [min].

Figures 4.1 and 4.2, it can be highlighted that the solids removal coefficient α is the most relevant for the concentration profile, while the combined contributions from drag and density do not seem to have a large effect.

4.3. Performance of clarifier units

Having now a better understanding on the dimension and isolated effects of each mechanism in the coupled problem, we turn to the simulation of the sedimentation of flocculated suspensions in a more realistic geometry. We consider the domain sketched in Figure 1.1, and take $R = 15$ [m] and $H = 7$ [m]. We suppose that the tank is initially filled with a homogeneous mixture of concentration $c_0 = 0.02$. Apart from the specifications in (2.2), (2.3), the remaining concentration-dependent and constant parameters needed in the model assume the following form (where the suspension is assumed of type *Kaolin flat D*)

$$\begin{aligned} \rho_s &= 2500 \text{ [kg/m}^3\text{]}, & c_{\text{in}} &= 0.05, & \rho_f &= 1000 \text{ [kg/m}^3\text{]}, & \omega &= 0.12 \text{ [rad/min]}, & \alpha &= 0.01 \text{ [min}^{-1}\text{]}, \\ \beta\rho_r &= 50 \text{ [kg/m}^3 \text{ m}^{-1}\text{]}, & c_r &= 1 \times 10^{-3}, & g &= 9.8 \text{ [m/s}^2\text{]}, & D_0 &= 0.05 \text{ [m}^2\text{/min]}, \\ \mathbf{u}_{\text{in}} &= -4.2\mathbf{k} \text{ [m/min]}, & \nu_0 &= 0.05 \text{ [kg/(m min)]}, \\ f_{\text{bk}}(c) &= 1.0 \times 10^{-4} c(1-c)^2 \text{ [m/s]}, & \sigma_e(c) &= \begin{cases} 0 & \text{for } c \leq c_c = 0.07 \\ (50.0/c_c)[(c/0.07)^5 - 1] \text{ [Pa]} & \text{for } c > c_c. \end{cases} \end{aligned}$$

We conduct a series of runs on the 3D geometry where the resulting tetrahedral mesh has 139001 elements and 27510 vertices (representing 1.1M DoFs for the lowest-order H(div)-conforming finite element method). The time stepping scheme uses a fixed timestep of $\tau = 0.5$ [min] and we simulate the

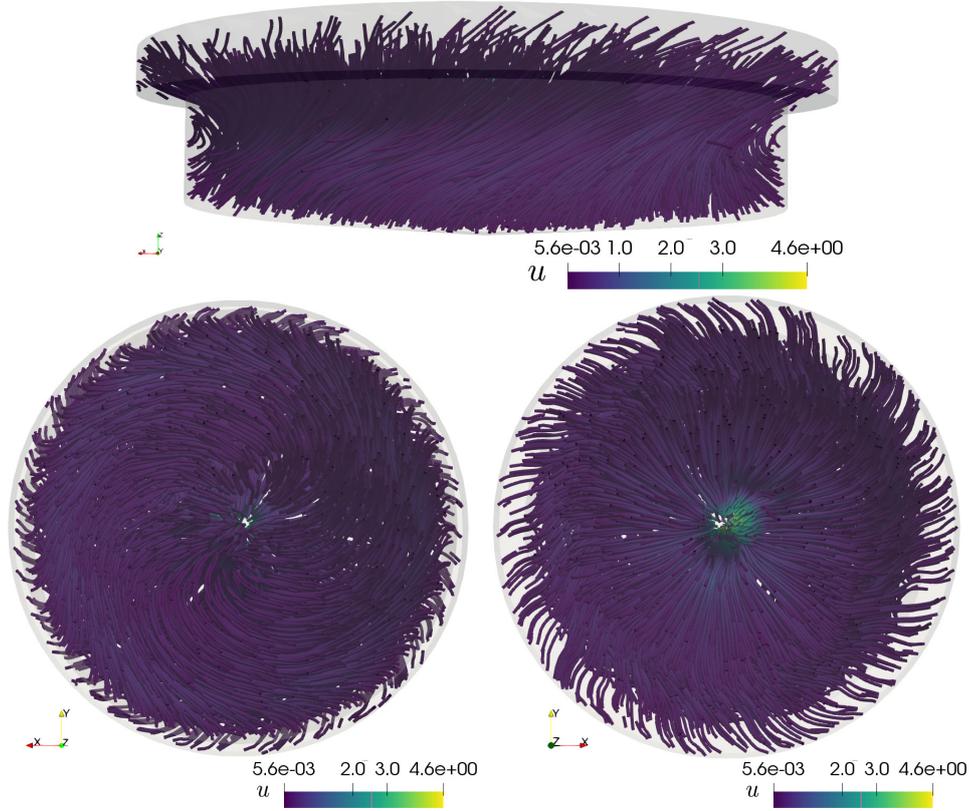


Figure 4.4: Velocity streamlines at 180 [min], shown from the side (top panel), from the bottom (bottom left figure), and from the top (bottom right figure).

process until 180 [min]. As mentioned above, one manifestation of performance in the clarifier units is the development of recirculation patterns, and we plot in Figure 4.3 the concentration profiles on a cut of the domain, as well as a slice of a section where we plot line integral contours of velocity, for three different times. The plots indicate a large diffusion of the concentration as it spreads out from the feedwell, and we also see a substantial modification on the flow patterns due to the combined contribution of the rake mechanism and the gravitational settling. The velocity can be seen more clearly from Figure 4.4, showing streamlines at $t = 180$ [min] from different angles, emphasising that the recirculation in the xy plane occurs mainly near the bottom of the vessel, whereas on the top the velocity is dominated by gravitational forces and a radially spreading concentration-driven flow.

On the other hand, the variation of the flow conditions depending on different factors can be observed from Figures 4.5, 4.6, and 4.7. There we portray the dynamics of the concentration and flow rate on the overflow, that is, respectively

$$\frac{1}{60\pi} \int_{\Gamma_{\text{on}}} c \, ds, \quad \frac{1}{60\pi} \int_{\Gamma_{\text{on}}} \mathbf{u} \cdot \mathbf{n} \, ds,$$

according to modifications in the solids removal intensity, on the drag and density of the rotating rake, and on the rake height. Based on the results of this set of simulations, we can identify the solids removal coefficient α as the most sensitive factor on the outputs of overflow concentration and overflow flow rate. On the other hand, the combined contributions from drag and density do not seem to have a large

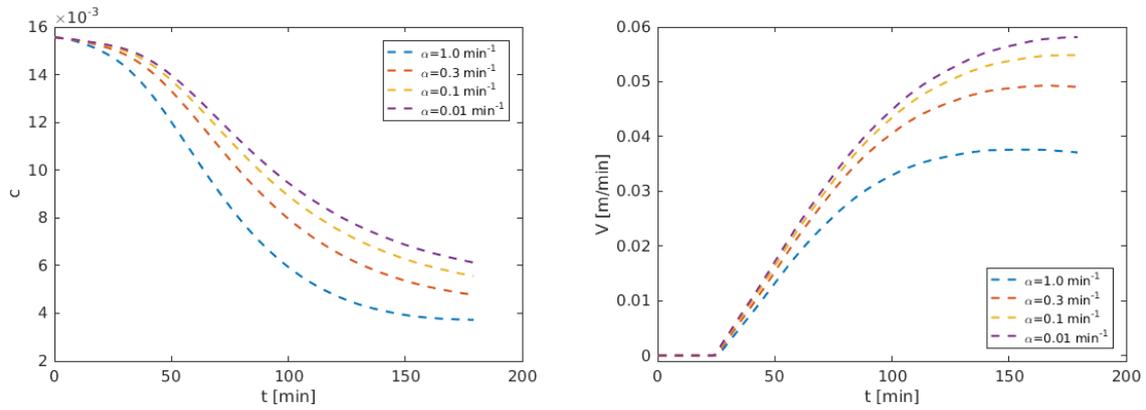


Figure 4.5: Time evolution of the concentration and normal velocity on the overflow for different values of the solids removal coefficient α .

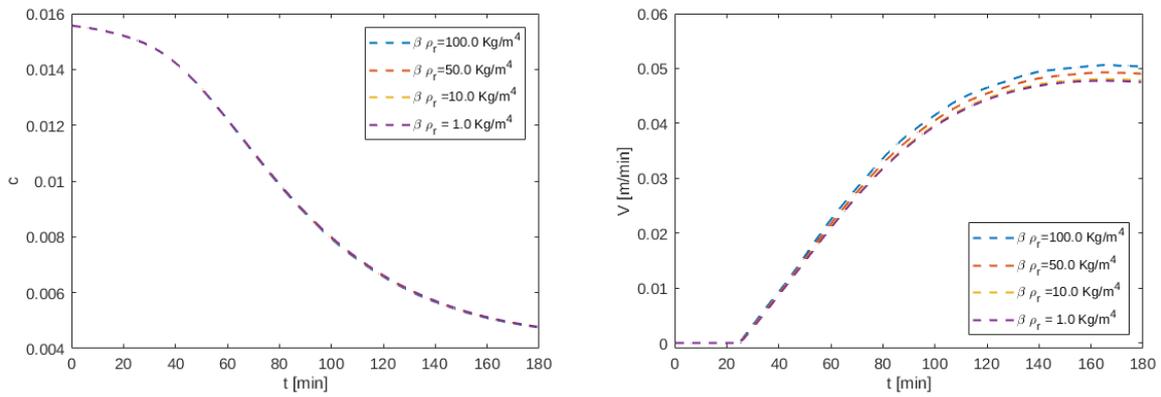


Figure 4.6: Time evolution of the concentration and normal velocity on the overflow for different values of the drag-density coefficient $\beta \rho_r$.

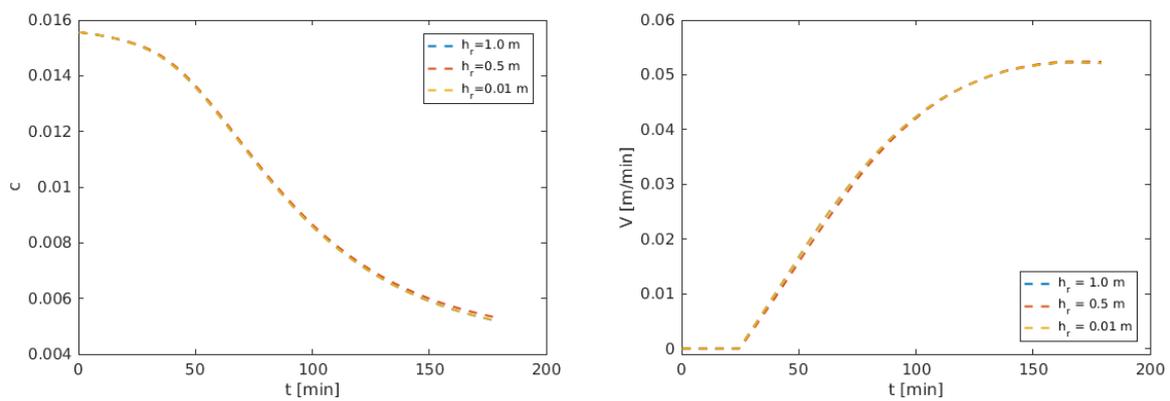


Figure 4.7: Time evolution of the concentration and normal velocity on the overflow for different values of rake height h_r .

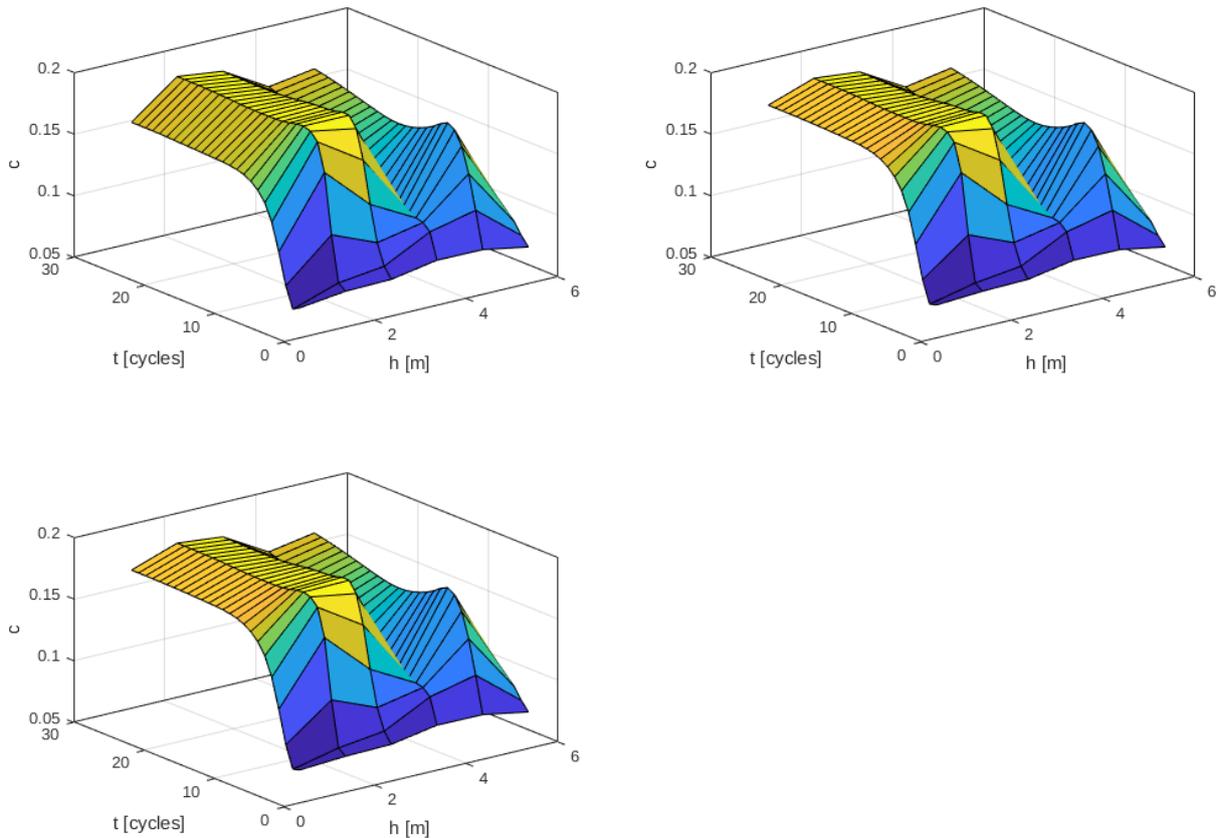


Figure 4.8: Spatio-temporal variation of the average concentration after complete rake cycles at different heights (measured from the bottom) with $\alpha = 0.3, \beta = 50$ (top left), $\alpha = 0.0, \beta = 50$ (top right), $\alpha = 0.0, \beta = 0.0$ (bottom).

effect on these markers, which is consistent with what we saw in the preliminary 2D test. However, a further inspection reveals that the effects are not necessarily localised but they differ over the height of the device. From Figure 4.8 we can see how the average concentration varies over time (and measured after a given number of cycles of the rotating rake) depending on the solids removal coefficient and on the drag.

5. Discussion and concluding remarks

We have advanced a model for the process of clarification and thickener in circular units in the presence of a spinning rake structure. The model is intrinsically 3D, it incorporates a detailed flow-sedimentation coupling in the settling mixture and it considers a simplified, one-way coupling that only imposes the velocity of the rotating arm which affects both the transport of solid particles and the revolving flow near the bottom of the tank. This addition constitutes an important generalisation over existing models for sedimentation-consolidation processes reviewed in e.g. [10]. The numerical method we have used is based on H(div)-conforming finite element methods for the flow and classical Lagrange elements for the solids concentration. A monolithic Newton scheme with exact Jacobian has been employed in all cases, and we have generated several tests to confirm the accuracy of the method and have analysed several cases relevant to the process of clarification. We hope that this study helps in gaining a fuller understanding of the operating conditions in clarifier units.

Several interesting extensions are left to be explored. Regarding modelling aspects, we mention that the present approach is likely to be more suitable for the application to clarifiers in wastewater treatment, since for that application the rake can be moved more easily through compacted sludge. In contrast, the sediments formed by the settling of mineral suspension exhibit major resistance to the motion of the rake, and the torque that needs to be applied (that is, the cost of energy) [34] and the precise conditions under which the rake could brake are of utmost importance (a rake being stuck or broken represents a major shutdown of the industrial process) [38]. Our model currently does not resolve the stresses generated in the structure, which is a natural next step. While the approach (2.4) is a rough approximation of the experimental and numerical observation that “rake blades typically suck material behind them as they move as well as pushing material in front of them” [36, p. 102] one could also easily extend the present development to the case of more adequate rheological models for the suspension [14], partly including the effect of shear [23, 24] and changes in floc structure [15, 25, 31]. In addition, for the flow regimes we have studied here, turbulent effects have little relevance but in some industrial settings this is crucial to resolve the separation of clear fluid and solid particles [16, 27]. Model reduction and the consistent connection with solid-flux theory should also be considered eventually [17]. On the other hand, there are a number of improvements we can add in terms of our numerical method. For instance, to concentrate in the design of partitioned solvers and efficient preconditioners needed for costly 3D computations with long time horizons [5]. We could also incorporate mixed formulations and space adaptivity through residual-based a posteriori error indicators [3], and employ more advanced flux reconstruction techniques useful in the regimes of convection-dominated flows and of degenerate diffusion of solids due to compression effects [11].

Acknowledgement. This work has been carried out during a visit of the second author to the Mathematical Institute at the University of Oxford. We thank the fruitful discussions and useful suggestions by Colin P. Please, Matthew Shirley, and Clint Wong. We also acknowledge the partial support by projects CRHIAM CONICYT / FONDAP / 15130015 and CONICYT / PIA / AFB170001; by CONICYT through the Becas-Chile program for foreign students; by the INRIA Associated Team “Efficient numerical schemes for non-local transport phenomena” (NOLOCO; 2018–2020); by SENESCYT Ecuador through the postgraduate scholarship program; and by the Oxford Centre for Doctoral Training on Industrially Focused Mathematical Modelling.

References

- [1] R. Aldbaissy, F. Hecht, G. Mansour, T. Sayah, A full discretisation of the time-dependent Boussinesq (buoyancy) model with nonlinear viscosity, *Calcolo* 55 (2018) 44:1–29.
- [2] M.S. Alnæs, J. Blechta, J. Hake, A. Johansson, B. Kehlet, A. Logg, C. Richardson, J. Ring, M.E. Rognes, G.N. Wells, The FEniCS project version 1.5, *Archive of Numerical Software* 3 (100) (2015) 9–23.
- [3] M. Alvarez, G.N. Gatica, R. Ruiz-Baier, A posteriori error estimation for an augmented mixed-primal method applied to sedimentation-consolidation systems, *J. Comput. Phys.* 367 (2018) 332–346.
- [4] D.N. Arnold, F. Brezzi, B. Cockburn, L.D. Marini, Unified analysis of discontinuous Galerkin methods for elliptic problems, *SIAM J. Numer. Anal.* 39 (2002) 1749–1779.
- [5] S. Badia, F. Verdugo, Robust and scalable domain decomposition solvers for unfitted finite element methods, *J. Comput. Appl. Math.* 344 (2018) 740–759.

- [6] D. Boffi, L. Gastaldi, A finite element approach for the immersed boundary method, *Computers & Structures* 81 (2003) 491–501.
- [7] D. Boffi, L. Gastaldi, Discrete models for fluid-structure interactions: the Finite Element Immersed Boundary Method, *Discr. Cont. Dyn. Syst. S* 9 (2016) 89–107.
- [8] F. Brezzi, J. Douglas, L.D. Marini, Two families of mixed finite elements for second order elliptic problems, *Numer. Math.* 47 (1985) 217–235.
- [9] F. Brezzi, M. Fortin, *Mixed and Hybrid Finite Element Methods*, Springer Verlag, 1991.
- [10] R. Bürger, J. Careaga, S. Diehl, C. Mejías, R. Ruiz-Baier, Convection-diffusion-reaction and transport-flow problems motivated by models of sedimentation: some recent advances, in B. Sirakov, P. de Souza, M. Viana (eds.), *Proceedings of the International Congress of Mathematicians, volume IV: Invited Lectures*, 3489–3514. World Scientific, Singapore, 2018.
- [11] R. Bürger, K.-K. Fjelde, K. Höfler, K.H. Karlsen, Central difference solutions of the kinematic model of settling of polydisperse suspensions and three-dimensional particle-scale simulations, *J. Engrg. Math.* 41 (2001) 167–187.
- [12] R. Bürger, S. Kumar, R. Ruiz-Baier, Discontinuous finite volume element discretization for coupled flow–transport problems arising in models of sedimentation, *J. Comput. Phys.* 299 (2015) 446–471.
- [13] R. Bürger, P.E. Méndez, R. Ruiz-Baier, On $H(\text{div})$ -conforming methods for double-diffusion equations in porous media, *SIAM J. Numer. Anal.* 57 (2019) 1318–1343.
- [14] R. Bürger, W.L. Wendland, F. Concha, Model equations for gravitational sedimentation-consolidation processes, *ZAMM Z. Angew. Math. Mech.* 80 (2000) 79–92.
- [15] G.M. Channell, C.F. Zukoski, Shear and compressive rheology of aggregated alumina suspensions, *AIChE J.* 43 (1997) 1700–1708.
- [16] S. Das, H. Bai, C. Wu, J.H. Kao, B. Barney, M. Kidd, M. Kuettel, Improving the performance of industrial clarifiers using three-dimensional computational fluid dynamics, *Engrg. Appl. Comput. Fluid Mech.* 10 (2016) 130–144.
- [17] S. Diehl, The solids-flux theory — confirmation and extension by using partial differential equations, *Water Rese.* 42 (2008) 4976–4988.
- [18] M. Discacciati, D. Hacker, A. Quarteroni, S. Quinodoz, S. Tissot, F.M. Wurm, Numerical simulation of orbitally shaken viscous fluids with free surface, *Int. J. Numer. Meth. Fluids* 71 (2013) 294–315.
- [19] D.A. Di Pietro, A. Ern, *Mathematical Aspects of Discontinuous Galerkin Methods*, Series Mathématiques et Applications. Springer-Verlag, Berlin, 2011.
- [20] G. Galdi, A.L. Silvestre, On the motion of a rigid body in a Navier-Stokes liquid under the action of a time-periodic force, *Indiana Univ. Math. J.* 58 (2009) 2805–2842.
- [21] C. Geuzaine, J.-F. Remacle, Gmsh: a three-dimensional finite element mesh generator with built-in pre- and post-processing facilities, *Int. J. Numer. Meth. Engrg.* 79 (2009) 1309–1331.
- [22] V. Girault, B. Rivière, M.F. Wheeler, A discontinuous Galerkin method with nonoverlapping domain decomposition for the Stokes and Navier-Stokes problems, *Math. Comput.* 74 (2005) 53–84.
- [23] B.R. Gladman, M. Rudman, P.J. Scales, The effect of shear on gravity thickening: Pilot scale modelling, *Chem. Eng. Sci.* 65 (2010) 4293–4301.

- [24] K. Gustavsson, J. Ooppelstrup, Consolidation of concentrated suspensions—numerical simulations using a two-phase model, *Comput. Visual. Sci.* 3 (2000) 39–45.
- [25] K. Gustavsson, J. Ooppelstrup, J. Eiken, Consolidation of concentrated suspensions—shear and irreversible floc structure rearrangement, *Comput. Visual. Sci.* 4 (2001) 61–66.
- [26] O.A. Karakashian, W.N. Jureidini, A nonconforming finite element method for the stationary Navier-Stokes equations, *SIAM J. Numer. Anal.* 35 (1998) 93–120.
- [27] D. Kleine, B.D. Reddy, Finite element analysis of flows in secondary settling tanks, *Int. J. Numer. Meth. Engrg.* 64 (2005) 849–876.
- [28] D. Kolomenskiy, K. Schneider, A Fourier spectral method for the Navier–Stokes equations with volume penalization for moving solid obstacles, *J. Comput. Phys.* 228 (2009) 5687–5709.
- [29] J. Könnö, R. Stenberg, H(div)-conforming finite elements for the Brinkman problem, *Math. Models Methods Appl. Sci.* 21 (2011) 2227–2248.
- [30] G.J. Kynch, A theory of sedimentation, *Trans. Faraday Soc.* 48 (1952) 166–176.
- [31] D.R. Lester, M. Rudman, P.J. Scales, Macroscopic dynamics of flocculated colloidal suspensions, *Chem. Eng. Sci.* 65 (2010) 6362–6378.
- [32] K. Nikitin, M. Olshanskii, K. Terekhov, Y. Vassilevski, R. Yanbarisov, An adaptive numerical method for free surface flows passing rigidly mounted obstacles, *Computers & Fluids* 148 (2017) 56–68.
- [33] R. Oyarzúa, T. Qin, D. Schötzau, An exactly divergence-free finite element method for a generalized Boussinesq problem, *IMA J. Numer. Anal.* 34 (2014) 1104–1135.
- [34] M. Rudman, K. Simic, D.A. Paterson, P. Strode, A. Brent, I.D. Šutalo, Raking in gravity thickeners, *Int. J. Mineral Process.* 86 (2008) 114–130.
- [35] R. Ruiz-Baier, I. Lunati, Mixed finite element – discontinuous finite volume element discretization of a general class of multicontinuum models, *J. Comput. Phys.* 322 (2016) 666–688.
- [36] I.D. Šutalo, D.A. Paterson, M. Rudman, Flow visualization and computational prediction in thickener rake models, *Minerals Eng.* 16 (2003) 93–102.
- [37] L. Szalai, P. Krebs, W. Rodi, Simulation of flow in circular clarifiers with and without swirl, *J. Hydraul. Engrg.* 120 (1994) 4–21.
- [38] S. Teerikoski, Optimal control of clarifier-thickeners, Master Thesis in Engineering Physics, Mathematics and Computer Science, Uppsala University, Sweden, 2017.
- [39] C. Wong, P.H. Trinh, S.J. Chapman, Shear-induced instabilities of flows through submerged vegetation, *arxiv:1904.11981v1*, (2019).
- [40] K. Yang, P. Sun, L. Wang, J. Xu, L. Zhang, Modeling and simulations for fluid and rotating structure interactions, *Comput. Meth. Appl. Mech. Engrg.* 311 (2016) 788–814.

Centro de Investigación en Ingeniería Matemática (CI²MA)

PRE-PUBLICACIONES 2019

- 2019-28 ANA ALONSO-RODRIGUEZ, JESSIKA CAMAÑO, EDUARDO DE LOS SANTOS, FRANCESCA RAPETTI: *A tree-cotree splitting for the construction of divergence-free finite elements: the high order case*
- 2019-29 RAIMUND BÜRGER, ENRIQUE D. FERNÁNDEZ NIETO, VICTOR OSORES: *A multi-layer shallow water approach for polydisperse sedimentation with sediment compressibility and mixture viscosity*
- 2019-30 LILIANA CAMARGO, BIBIANA LÓPEZ-RODRÍGUEZ, MAURICIO OSORIO, MANUEL SOLANO: *An HDG method for Maxwell equations in heterogeneous media*
- 2019-31 RICARDO OYARZÚA, SANDER RHEBERGEN, MANUEL SOLANO, PAULO ZUÑIGA: *Error analysis of a conforming and locking-free four-field formulation in poroelasticity*
- 2019-32 GABRIEL N. GATICA, MAURICIO MUNAR, FILANDER A. SEQUEIRA: *A mixed virtual element method for the Boussinesq problem on polygonal meshes*
- 2019-33 SERGIO CAUCAO, GABRIEL N. GATICA, RICARDO OYARZÚA, FELIPE SANDOVAL: *Residual-based a posteriori error analysis for the coupling of the Navier-Stokes and Darcy-Forchheimer equations*
- 2019-34 GABRIEL N. GATICA, RICARDO OYARZÚA, NATHALIE VALENZUELA: *A five-field augmented fully-mixed finite element method for the Navier-Stokes/Darcy coupled problem*
- 2019-35 LUIS MIGUEL DE OLIVEIRA VILACA, BRYAN GOMEZ-VARGAS, SARVESH KUMAR, RICARDO RUIZ-BAIER, NITESH VERMA: *Advection-diffusion-reaction in poroelastic media. Part I: Well-posedness and discrete analysis*
- 2019-36 CARLO LOVADINA, DAVID MORA, IVÁN VELÁSQUEZ: *A virtual element method for the von Kármán equations*
- 2019-37 ELIGIO COLMENARES, GABRIEL N. GATICA, SEBASTIAN MORAGA, RICARDO RUIZ-BAIER: *A fully-mixed finite element method for the steady state Oberbeck-Boussinesq system*
- 2019-38 ELIGIO COLMENARES, GABRIEL N. GATICA, WILLIAN MIRANDA: *Analysis of an augmented fully-mixed finite element method for a bioconvective flows model*
- 2019-39 RAIMUND BÜRGER, PAUL E. MÉNDEZ, RICARDO RUIZ-BAIER: *Convergence of $H(\text{div})$ -conforming schemes for a new model of sedimentation in circular clarifiers with a rotating rake*

Para obtener copias de las Pre-Publicaciones, escribir o llamar a: DIRECTOR, CENTRO DE INVESTIGACIÓN EN INGENIERÍA MATEMÁTICA, UNIVERSIDAD DE CONCEPCIÓN, CASILLA 160-C, CONCEPCIÓN, CHILE, TEL.: 41-2661324, o bien, visitar la página web del centro: <http://www.ci2ma.udec.cl>



**CENTRO DE INVESTIGACIÓN EN
INGENIERÍA MATEMÁTICA (CI²MA)
Universidad de Concepción**



Casilla 160-C, Concepción, Chile
Tel.: 56-41-2661324/2661554/2661316
<http://www.ci2ma.udec.cl>

